SHENZHEN YINGYUAN ELECTRONICS CO.,LTD

Add: The 8th Building, Hongye Industrial Zone, Jiuwei Village,
Xixiang, Bao'an District, Shenzhen, China P.C.: 518126
Tel: 0755-29785882 Fax: 0755-29785684
Web: www.szyingyuan.com

ULLPOWER®



深圳市盈源电子有限公司
Shenzhen Yingyuan Electronics co.,Ltd



PROFESSIONAL POWER SUPPLY MANUFACTURE

Shenzhen Yingyuan electronics Co., Ltd was set up in 1998,a professional high-tech manufacturer of switching power supply and chargers. Own Standard automatic production-line, advanced high-tech testing devices and scientific managemen system.All of our products are compliance with UL/CUL, FCC,CE,GS,CB,RCM,PSE,KC/KCC,BS,CCC etc safety standards. What's more, also meet Energy star VI and green environment protection RoHS,REACH etc. Our product mainly export Overseasmaeket such as Europe, North America, Australia, Japan, South Korea etc..

FACTORY TOUR










International Certification Approval













Contents

Power Adapter

16320 6W 2
14200 6W 3
17070 12W 4
15300 12W 5
15700 12W 6
18020 20W 7
18060 24W 8
19020 30W 9
16170 36W 10
16190 48W 11
16210 65W 12
17100 120W 13

USB Charger

C23/24 1-Port Charger 15
C25 1-Port Charger 16
C4 2-Port Charger 17
C27 2-Port Charger 18
C6 4-Port Charger 19
C21 QC3.0 Charger 21
C26 QC3.0 Charger 22
C29 QC3.0+USB Charger 23
C1810 QC4.0 Charger 25
C20 Type-C Charger 26
C32 Type-C Charger 27
C30 Type-C+USB Charger 28

Type-c Multi-blade Charger

C1801 18W PD Type-C Charger 30
C1802 30W PD Type-C Charger 31
C1803 45W PD Type-C Charger 32
C1804 60W PD Type-C Charger 33

I5300
I2W

I6320 6W POWER ADAPTER/USB POWER ADAPTER





Features:

- Universal AC Input/ Full Range
- Wall-mount / Interchangeable / Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension：45.5*40.9*22.9mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW06C-050-0500ZF	5	500	30
	SAW06C-059-1000ZF	5.9	1000	50
	SAW06C-050-1200ZF	5	1200	50
	SAW06C-090-0500ZF	9	500	50
	SAW06C-120-0500ZF	12	500	20

I4200 6W POWER ADAPTER/USB POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension: 39*24*42mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW06D-050-0500ZF	5	500	30
	SAW06D-050-1000ZF	5	1000	40
	SAW06D-050-1200ZF	5	1200	50
	SAW06D-090-0500ZF	9	500	50
	SAW06D-120-0500ZF	12	500	20

I7070 I2W POWER ADAPTER/ USB POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension: 39*24*42mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW12D-050-2100ZF	5	2100	60
	SAW12D-075-1600ZF	7.5	1600	60
	SAW12D-090-1200ZF	9	1200	90
	SAW12D-120-1000ZF	12	1000	100
	SAW12D-240-0500ZF	24	500	120

15300 12W POWER ADAPTER/ USB POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount / Interchangeable / Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension: 59*41*26.5mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW12-050-2100ZF	5	2100	60
	SAW12-075-1600ZF	7.5	1600	60
	SAW12-090-1200ZF	9	1200	90
	SAW12-120-1000ZF	12	1000	100
	SAW12-240-0500ZF	24	500	120

15700 12W POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount / Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension: 74.5*28.7*63.3mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW12F-050-2100	5	2100	60
	SAW12F-075-1600	7.5	1600	60
	SAW12F-090-1200	9	1200	90
	SAW12F-120-1000	12	1000	100
	SAW12F-240-0500	24	500	120

18020 20W POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount / Interchangeable / Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension：59*41*26.4mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW20-050-3000Z	5	3000	50
	SAW20-090-2000Z	9	2000	90
	SAW20-120-1500Z	12	1500	100

18060 24W POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount / Interchangeable / Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension：74.5*28.7*63.3mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW24-090-2500Z	9	2500	90
	SAW24-120-2000Z	12	2000	100
	SAW24-240-1000Z	24	1000	120

18020 20W POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount / Interchangeable / Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension：59*41*26.4mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW20-050-3000Z	5	3000	50
	SAW20-090-2000Z	9	2000	90
	SAW20-120-1500Z	12	1500	100

18060 24W POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount / Interchangeable / Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension：74.5*28.7*63.3mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW24-090-2500Z	9	2500	90
	SAW24-120-2000Z	12	2000	100
	SAW24-240-1000Z	24	1000	120

I6190 48W POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount / Interchangeable / Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension：97.3*45.3*31mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW48-090-5000Z	9	5000	90
	SAW48-120-4000Z	12	4000	100
	SAW48-180-2500Z	18	2500	100
	SAW48-240-2000Z	24	2000	120
	SAW48-480-1000Z	48	1000	120

I6210 65W POWER ADAPTER



Features:

- Universal AC Input/ Full Range
- Wall-mount / Interchangeable / Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension：120.5*51.5*33.2mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	SAW65-090-6000Z	9	6000	100
	SAW65-120-5000Z	12	5000	100
	SAW65-170-3000Z	17	3000	100
	SAW65-190-3160Z	19	3160	100
	SAW65-240-2500Z	24	2500	100

17100 120W POWER ADAPTER





Features:

- Universal AC Input/ Full Range
- Desktop type
- Energy Efficiency Level VI
- LPS Compliant
- Output Protections: OVP/SCP/OCP
- 3 Year Warranty
- Dimension：120*51*33mm

Typical Model List :

I/P Voltage	Model No.	Output Voltage(V)	Output Current(mA)	Ripple & Noise(mV)
90-264V 50-60Hz	CGSW120-120-10000II	12	10000	100
	CGSW120-240-05000II	24	5000	100
	CGSW120-480-02500II	48	2500	100

USB CHARGER













C23 / C24 SINGLE USB CHARGER



Features:

- 1 Port Wall-mount USB Charger
- EU/ US Plug Available
- Compact Size
- 10.5 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Super Smart:
  Every USB Port Charges Faster
  and More efficient With Smart Technology

Typical Model List :

I/P Voltage	Model	Output Voltage(V)	Output Current(mA)	Dimension	Output USB
100-240V 50-60Hz	C23	5	1000	33*21*41mm	Single port
	C24	5	2100		

C25 SINGLE USB CHARGER



Features:

- 1 Port Wall-mount USB Charger
- EU/ US Plug Available
- Compact Size
- 12 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Super Smart:
  Every USB Port Charges Faster
  and More efficient With Smart Technology

Typical Model List :

I/P Voltage	Model	Output Voltage(V)	Output Current(mA)	Dimension	Output USB
100-240V 50-60Hz	C25	5	2400	35*23*41.5mm	Single port

C4 DUAL USB CHARGER





Features:

- 2 Port Wall-mount USB Charger
- EU/ Foldable US Plug Available
- Compact Size
- 17 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Super Smart:
  Every USB Port Charges Faster
  and More efficient With Smart Technology

Typical Model List :

I/P Voltage	Model	Output Voltage(V)	Output Current(mA)	Dimension	Output USB
100-240V 50-60Hz	C4	5	3400	56*47*29mm	Dual port With 2 powerIQ chip

C27 DUAL USB CHARGER





Features:

- 2 Port Wall-mount USB Charger
- EU/ Foldable US Plug Available
- Compact Size
- 24Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Super Smart:
  Every USB Port Charges Faster
  and More efficient With Smart Technology

Typical Model List :

I/P Voltage	Model	Output Voltage(V)	Output Current(mA)	Dimension	Output USB
100-240V 50-60Hz	C27	5	4800	45*45*28.5mm	Dual port With 2 powerIQ chip

C6 4PORT USB CHARGER



Features:

- 4 Port Wall-mount USB Charger
- EU/ KC/Foldable US Plug Available
- Compact Size
- 25 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Super Smart:
  Every USB Port Charges Faster
  and More efficient With Smart Technology

Typical Model List :

I/P Voltage	Model	Output Voltage(V)	Output Current(mA)	Dimension	Output USB
100-240V 50-60Hz	C6	5	4900	75*57.5*29mm	4 port With 4 powerIQ chip

QC3.0 CHARGER









C21 QUALCOMM3.0 QUICK CHARGER



Features:

- 1 Port Wall-mount Quick 3.0 Charger
- EU/ US Plug Available
- Compact Size
- 18 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Qualcomm 3.0 Approved

Typical Model List :

I/P Voltage	Model	Output	Dimension	Output USB
100-240V 50-60Hz	C21	5V3A 9V2A 12V1.5A	45.8*26*52mm	Single QC3.0 Port

C26 QUALCOMM2.0/3.0 QUICK CHARGER



Features:

- 1 Port Wall-mount Quick Charger 3.0
- EU/ US/ Korea/CN/AU/UK/Japan/ Brazil /Taiwan Plug Available
- Compact Size
- 18 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Global Cercification Approved : UL/CE/GS/RCN/PSE/CCC/KC/BSMI/NOM

Typical Model List :

I/P Voltage	Model	Output	Dimension	Output USB
100-240V 50-60Hz	C26	5V2A 9V2A 12V1.5A	39*27*43mm	Single Port

C29 QC3.0+USB CHARGER




Features:

- 2 Port Wall-mount Quick 3.0 Charger
- EU/ US/ AU Plug Available
- Compact Size
- 30 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Certification Approved : CE /UL /RCM/FCC
- Qualcomm 3.0 Approved
- Super Smart:
  Every USB Port Charges Faster
  and More efficient With Smart Technology

Typical Model List :

I/P Voltage	Model	Output		Dimension	Output USB
		Port A	Port B		
100-240V 50-60Hz	C29	5V2.4A	5V3A 9V2A 12V1.5A	53.5*54.5*28.5mm	Dual Port With 1 powerIQ Chip + QC3.0 Port

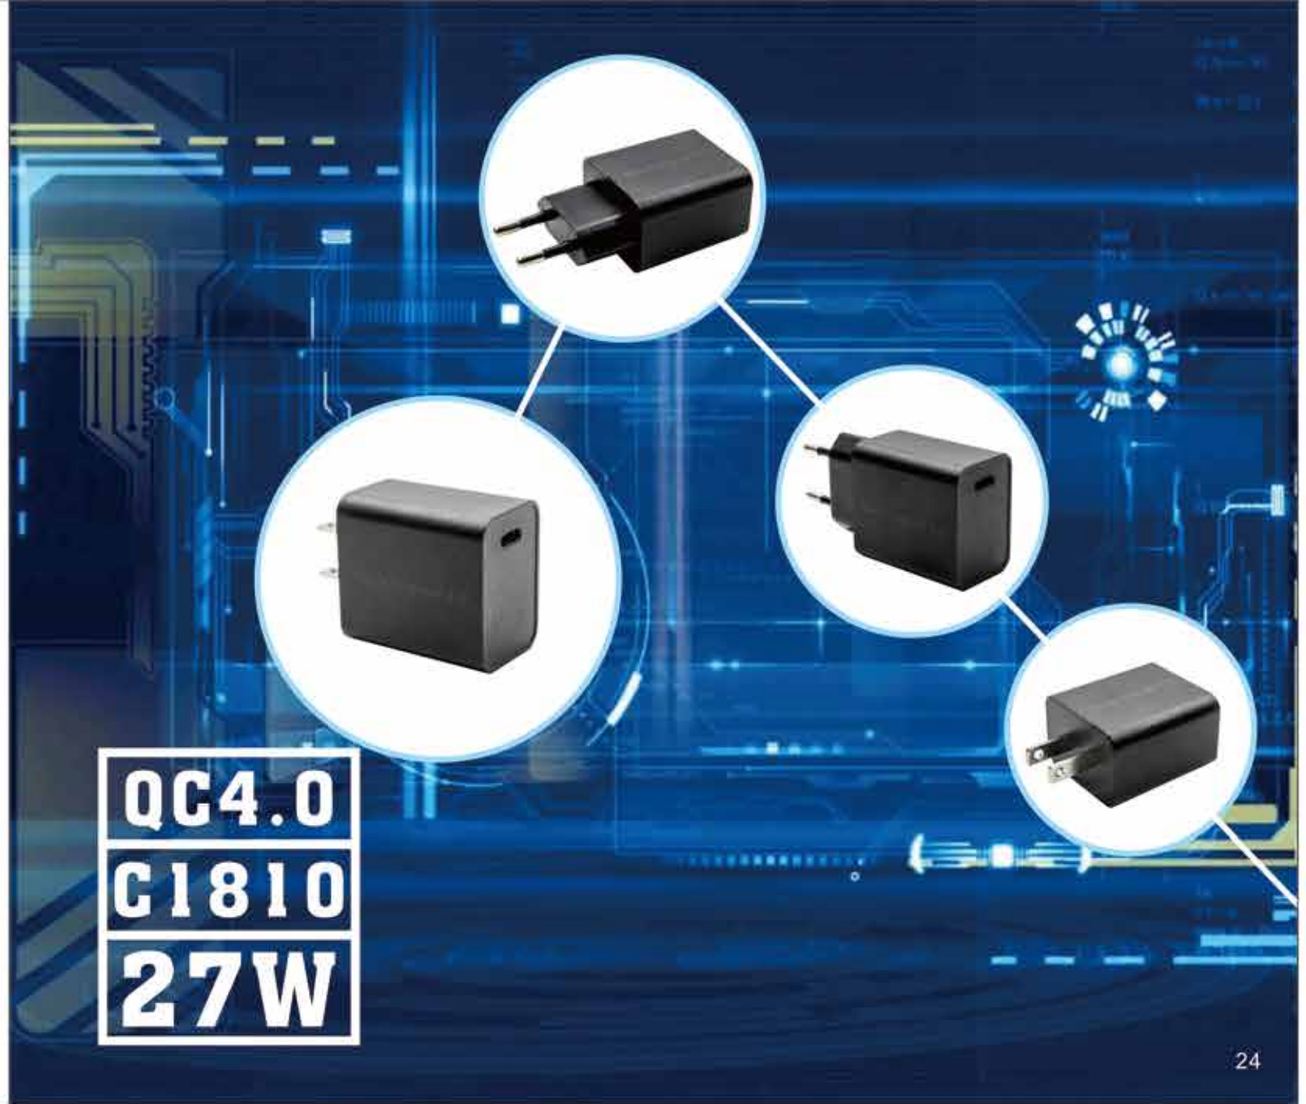

C1810 27W QC4.0 TYPE-C PD CHARGER



Features:

- 1 Port QC4.0 & PD Type-c Charger
- EU/ US/ Korea/CN/AU/UK/Japan/ Brazil /Taiwan Plug Available
- Compact Size
- 27 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Global Cercification Approved : UL/CE/GS/RCN/PSE/CCC/KC/BSMI/NOM

Typical Model List :

I/P Voltage	Model	Output	Dimension	Output USB
100-240V 50-60Hz	C1810	QC4+: 3.5-5.9V3A,3.3-11V3A PD: 5V3A/9V3A/12V2.25A 15V1.8A/20V1.35A	39*26.9*43mm	Single Port

C20 TYPE-C PORT CHARGER



Features:

- Wall-mount Type-C Charger
- EU/ US Plug Available
- Compact Size
- 30 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- PD Function: Charge For Macbook 12 Inch/ Macbook Pro 13.3 Inch / Huawei Matebook and more USB-C Devices
- Smart Detect Chip: Offer The Faster Charging Speed For Many Other Non-TypeC Devices

Typical Model List :

I/P Voltage	Model	Output	Dimension	Output USB
100-240V 50-60Hz	C20	5V3A 9V2A 12V2A 20V1.5A	48*28*56mm	Single TypeC

C32 TYPE-C PORT CHARGER




Features:

- Wall-mount Type-C Charger
- EU/ US Plug Available
- Compact Size
- 30 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- PD Function:
  Charge For Macbook 12 Inch/ Macbook Pro 13.3 inch / Huawei Matebook and more USB-C Devices
- Smart Detect Chip:
  Offer The Faster Charging Speed For Many Other Non-TypeC Devices

Typical Model List :

I/P Voltage	Model	Output	Dimension	Output USB
100-240V 50-60Hz	C32	5V3A 9V2A 12V1.5A 20V1.5A	53.5*54.5*28.5mm	Single TypeC

C30 TYPE-C+USB CHARGER

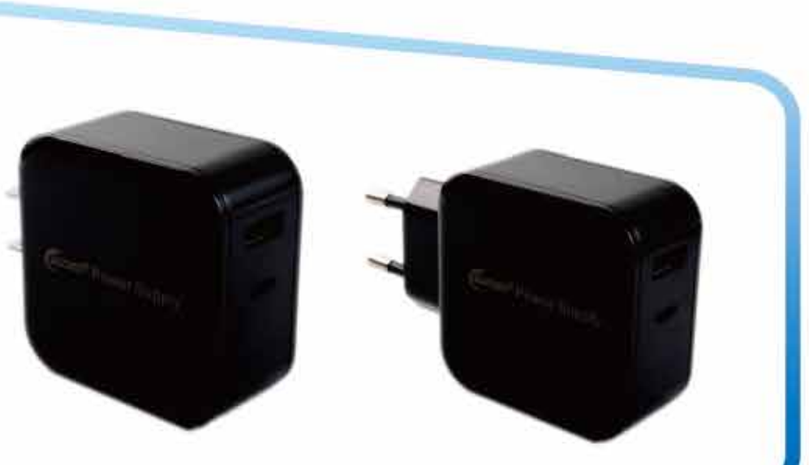

Features:

- 2 Port Wall-mount Type-C Charger
- EU/ US/ AU Plug Available
- Compact Size
- 30 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- Certification Approved : CE /UL /RCM/FCC
- Super Smart:
  USB Port A Charges Faster and More efficient With Smart Technology
- Smart Detect Chip:
  USB Port B Offer The Faster Charging Speed For Many Other Non-TypeC Devices

Typical Model List :

I/P Voltage	Model	Output		Dimension	Output USB
		Port A	Port B		
100-240V 50-60Hz	C30	5V2.4A	5V3A 9V2A 12V1.5A 20V1.5A	53.5*54.5*28.5mm	Dual Port With 1 powerIQ Chip + Type-C Port

TYPE-C CHARGER





- Type-C Charger: 18W/30W/45W/60W
- Interchangeable plug
- PD function
- Compact size



C1801 18W PD TYPE-C CHARGER



Features:

- Wall-mount Type-C Charger
- EU/ US/**AU**/**U**K Plug Available
- Compact Size
- 18 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- PD Function:
  Charge For Macbook 12 Inch/ Macbook Pro 13.3 inch / Huawei Matebook and more USB-C Devices
- Smart Detect Chip:
  Offer The Faster Charging Speed For Many Other Non-TypeC Devices

Typical Model List :

I/P Voltage	Model	Output	Dimension	Output USB
100-240V 50-60Hz	C1801	5V3A 9V2A 12V1.5A	48*48*28mm	Single TypeC

C1802 30W PD TYPE-C CHARGER



Features:

- Wall-mount Type-C Charger
- EU/ US /AU/UKPlug Available
- Compact Size
- 30 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- PD Function:
  Charge For Macbook 12 Inch/ Macbook Pro 13.3 Inch / Huawei Matebook and more USB-C Devices
- Smart Detect Chip:
  Offer The Faster Charging Speed For Many Other Non-TypeC Devices

Typical Model List :

I/P Voltage	Model	Output	Dimension	Output USB
100-240V 50-60Hz	C1802	5V3A 9V3A 12V2A 15V2A 20V1.5A	53*53*28mm	Single TypeC

C1803 45W PD TYPE-C CHARGER



Features:

- Wall-mount Type-C Charger
- EU/ US /AU/UKPlug Available
- Compact Size
- 45 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- PD Function:
  Charge For Macbook 12 Inch/ Macbook Pro 13.3 Inch / Huawei Matebook and more USB-C Devices
- Smart Detect Chip:
  Offer The Faster Charging Speed For Many Other Non-TypeC Devices

Typical Model List :

I/P Voltage	Model	Output	Dimension	Output USB
100-240V 50-60Hz	C1803	5V3A 9V3A 12V3A 15V3A 20V2.25A	58*58*29mm	Single TypeC

C1804 60W PD TYPE-C CHARGER



Features:

- Wall-mount Type-C Charger
- EU/ US/AU/UK Plug Available
- Compact Size
- 60 Watt Max Power Consumption
- Output Protections OCP/ OVP/SCP
- PD Function:
  Charge For Macbook 12 Inch/ Macbook Pro 13.3 Inch / Huawei Matebook and more USB-C Devices
- Smart Detect Chip:
  Offer The Faster Charging Speed For Many Other Non-TypeC Devices

Typical Model List :

I/P Voltage	Model	Output	Dimension	Output USB
100-240V 50-60Hz	C1804	5V3A 9V3A 12V3A 15V3A 20V3A	66.5*66.5*29mm	Single TypeC