
AULICE

HUBEI AULICE TYRE CO.,LTD.

TRUCK & BUS TYRE

PROFESSIONAL MANUFACTURER



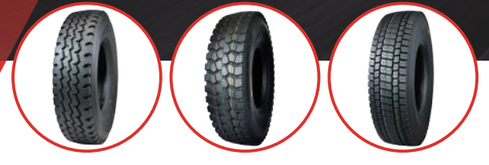

AULICE

HUBEI AULICE TYRE CO.,LTD.

HUBEI AULICE TYRE CO.,LTD.

Add:East New District,YangXin Industrial Zone,Hubei Province China.
Tel:+86-27-87775708
Mob:+86-13207128011 (Adora zhao)
Email:adorazhao@aulicetyre.com info@aulicetyre.com
Web:http://www.aulicetyre.com

HUBEI AULICE TYRE CO.,LTD.

COMPANY PROFILE



COMPANY PROFILE

Hubei Aulice Tyre Co., Ltd. is a large leading tyre manufacturer established in 1998, which integrates scientific research, design, production, and sales of TBR,OTR ,and TBB tyres.

With the first established plant of all-steel radial truck tyre in 2012, AULICE strive to meet the growing demand in developing markets and ensure our customers enjoy high-quality tyres at reasonable prices. AULICE owns it's over 20 years experienced R&D team and research institute of formula, structure, technology. Powered by a large number of professional tyre technicians and senior engineers, it covered 94 sizes, 67 kinds of patterns, 17 R & D patents and 30 registered trademarks.

All of the products have obtained international approvals such as CCC, DOT, ECE, GCC, SNI, SGS ,SONCAP. Producing in compliance with the requirements of ISO9001:2000 and gaining recognition in broad markets.

Based on a production capacity of 6000 sets of all-steel radial tyre and 2500 sets of off-road tyre per day, Aulice keep increasing the market shares and sells branded tyre AULICE, VANLUSTONE, AOLAISI, JIASHIBAO, SANTIAN, QUNYING to more than 30 provinces in the domestic market and over 30 overseas countries. In Oct 2019, Aulice invested another new plant in Xianning city, which designed to meet another 6000 sets of all-steel radial tyre per day.

In the future Aulice will strive to become the No.1 intelligent tyre manufacture using the internet+ concept with mega data technology and AI solution to build a smart and powerful tyre solution platform in the tyre industry. It will provide a very accurate solution to the end-users with different requirements in varies road conditions.







CORPORATE CULTURE

CORPORATE CULTURE



01 SERVICE POLICY

USERS WILL BE PROVIDED WITH HIGH-QUALITY PRODUCTS AND EXCELLENT AFTER-SALES SERVICE PROCEDURES.

SERVICE PURPOSE 02


CUSTOMER SATISFACTION IS OUR ONLY CRITERION.

03 ENTERPRISE CORE VALUES

PASSIONATE
INNOVATIVE
RESPONSIBLE
COOPERATIVE
EXPERIENCED
INSIGHTFUL



WORKSHOP EQUIPMENT

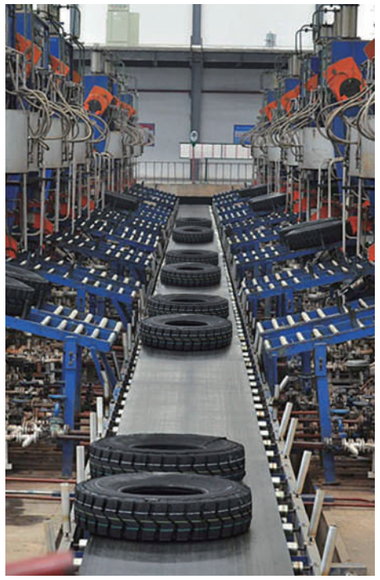















CERTIFICATE OF HONOR



● ISO9001 CERTIFICATE



● ISO14001 CERTIFICATE



● GCC CERTIFICATE



● DOT CERTIFICATE



● CCC CERTIFICATE



● EXPORT CERTIFICATE



● LISTED RESERVE ENTERPRISES



● SNI CERTIFICATE



● ECE CERTIFICATE



● TOP 100 MANUFACTURING ENTERPRISES IN HUBEI



PRODUCT LIST

PRODUCT LIST


AR1017/101


AR111


AR112


AR113


AR133


AR168


AR156小全钢


AR158小全钢


AR188


AR266


AR268


AR3137


AR316


AR317


AR318


AR332


AR338


AR3581


AR366


AR377


AR399


AR412


AR413


AR415


AR417


AR418


AR5157


AR5158


AR5251


AR527


AR535


AR558


AR565


AR581


AR585


AR587


AR595


AR596


AR597

AR665

AR666

AR667

AR731

AR737

AR7381

AR766

WR221

WR223

AR815

AR818

AR819

AR868

AR869

AR878

AR888

AR898

AR900

AR916

AR918

AR999

AR216

AR218

AR513

AR586

AR5255

HL658

HL618

WR221


WR223

PRODUCT INTRODUCTION



1.The unique tread compound formula reduces irregular wear,extend tire life time.
2. Upgraded pattern design provides excellent ground grip and outstanding wet skid resistance.
3. Better heat dissipation, safer driving performance.
4.Superb reinforced tire bead design ensures a better loading capacity on mixed road.

AR1017/101




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
6.50R16LT	12PR	12.0	110/105	L	1060(2335)	925(2040)	670(100)	5.5F
7.00R16LT	14PR	12.0	118/114	L	1320(2910)	1180(2600)	770(110)	5.5F
7.50R16LT	14PR	13.5	122/118	L	1500(3305)	1320(2910)	770(110)	6.0G
8.25R16LT	14PR	14.0	126/122	L	1700(3750)	1500(3305)	670(100)	6.5H
8.25R16LT	16PR	14.0	128/124	L	1800(3970)	1600(3525)	770(110)	6.5H
8.25R20	14PR	17.0	136/134	K	2240(4940)	2120(4675)	830(120)	6.5
8.25R20	16PR	17.0	139/137	K	2430(5360)	2300(5070)	930(135)	6.5
9.00R20	14PR	17.5	141/139	K	2575(5675)	2430(5355)	790(115)	7.0
9.00R20	16PR	17.5	144/142	K	2800(6175)	2650(5840)	900(130)	7.0
10.00R20	16PR	16.0	146/143	K	3000(6610)	2725(6010)	830(120)	7.5
10.00R20	18PR	16.0	149/146	K	3250(7160)	3000(6610)	930(135)	7.5
11.00R20	16PR	15.5	150/147	K	3350(7385)	3075(6780)	830(120)	8.0
11.00R20	18PR	15.5	152/149	K	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	15.5	154/151	K	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	15.5	156/153	K	4000(8820)	3650(8050)	900(130)	8.5

PRODUCT INTRODUCTION



1.Special pattern design provides better wear resistance, superb wet-ground gripping and low noise.
2.Optimized tire contour design brings low rolling resistance ang fuel consumption.
3.Special tread compund formula to improve tire durability.
4.Suitable for light truck on all wheel position and good pavement.

AR111



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
6.50R16LT	12PR	12.0	110/105	L	1060(2335)	925(2040)	670(100)	5.50F
7.00R16LT	14PR	12.0	118/114	K	1320(2910)	1180(2600)	770(110)	5.50F
7.50R16LT	14PR	13.5	122/118	L	1500(3305)	1320(2910)	770(110)	6.00G
8.25R16LT	16PR	14.0	128/124	L	1800(3970)	1600(3525)	770(110)	6.50H

PRODUCT INTRODUCTION



1.Special tread compound formula reduces irregular wear, extend longer life time on good road.
2.Open shoulder grooves design enhances ground grip , heat-dissipation and self-cleaning performance.

AR112



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
6.50R16LT	12PR	10.5	110/105	G	1060(2335)	925(2040)	670(100)	5.50F
7.00R16LT	14PR	11.5	118/114	G	1320(2910)	1180(2600)	770(110)	5.50F
7.50R16LT	14PR	12.0	122/118	G	1500(3305)	1320(2910)	770(110)	6.00G
8.25R16LT	16PR	14.0	128/124	G	1800(3970)	1600(3525)	770(110)	6.50H
11.00R20	16PR	16.5	150/147	J	3350(7385)	3075(6780)	830(120)	8.0
11.00R20	18PR	16.5	152/149	J	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	16.5	154/151	J	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	16.5	156/153	J	4000(8820)	3650(8050)	900(130)	8.5
12R22.5	16PR	20.0	150/147	J	3350(7385)	3075(6780)	830(120)	9.0
12R22.5	18PR	20.0	152/149	J	3550(7830)	3250(7160)	930(135)	9.0

PRODUCT INTRODUCTION



1.The unique tread compound formula improves wear performance and reduces heat generation,making driving more safer.
2.Suitable for mid-long haul truck on all kinds of good road.

AR133



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	16PR	15.0	150/147	K	3350(7385)	3075(6780)	830(120)	8.0
11.00R20	18PR	15.0	152/149	K	3550(7830)	3250(7160)	930(135)	8.0

PRODUCT INTRODUCTION



1. Low rise hot tread compound formula can effectively improve tire wear resistance.
2. Super strong carcass structure, excellent load performance.
3. Suitable for national highway and pavement, full wheel tire.

AR158



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	18PR	16.2	154/151	J	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	16.2	156/153	J	4000(8820)	3650(8050)	900(130)	8.5



AR188

PRODUCT INTRODUCTION

1.Special tread compound formula brings better wear resistance.
2.Suitable for mid-long distance on all kinds of good road.
3.It has superior driving and braking force as well as ground grip.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	16PR	16.0	150/147	J	3350(7385)	3075(6780)	830(120)	8.00
11.00R20	18PR	16.0	152/149	J	3550(7830)	3250(7160)	930(135)	8.00



AR266

PRODUCT INTRODUCTION

1.Widened tread design and wear-resistant tread formula brings long mileage.
2.Four circumferencial grooves with variable angle design offers excellent high speed performance.
3.Reinforced belt steel wire ensures uniform wear.
4.Suitable for long-distance trucks and bus on steering wheel position and good roads such as highways.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	15.5	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	15.5	152/149	J	3550(7830)	3250(7160)	930(135)	9.00



AR268

PRODUCT INTRODUCTION

1.Widened tread design and wear-resistant tread formula brings long mileage.
2.Three circumferencial grooves with variable angle design offers excellent high speed performance.
3.Reinforced belt steel wire design enhances life time of the tire.
4.Suitable for long-distance heavy-duty truck on all wheel positions and good roads such as highways.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	16.0	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	16.0	152/149	J	3550(7830)	3250(7160)	930(135)	9.00



AR3137

PRODUCT INTRODUCTION

1.The classical pattern design provides outstanding wear resistance and good heat dissipation.
2.Rib-Lug grooves pattern design offers strong traction, superior ground grip and good drainage.
3.On driving wheel position, it brings high mileage of low fuel consumption.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
6.50R16LT	12PR	12.0	110/105	G	1060(2335)	925(2040)	670(100)	5.5F
7.00R16LT	14PR	13.5	118/114	G	1320(2910)	1180(2600)	770(110)	5.5F
7.50R16LT	14PR	14.0	122/118	G	1500(3305)	1320(2910)	770(110)	6.00G
8.25R16LT	16PR	14.5	128/124	G	1800(3970)	1600(3525)	770(110)	6.50H
10.00R20	18PR	19.5	149/146	J	3250(7160)	3000(6610)	930(135)	7.5
11.00R20	16PR	19.0	150/147	J	3350(7385)	3075(6780)	830(120)	8.0
11.00R20	18PR	19.0	152/149	J	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	20PR	19.0	156/153	J	4000(8820)	3650(8050)	900(130)	8.5



AR316

PRODUCT INTRODUCTION

1.Applied for light truck on driving wheel position.
2.Unique pattern design with deep transverse pattern grooves guarantee excellent heat dissipation, self-cleaning and strong traction on mixed road.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
6.50R16LT	12PR	15.5	110/105	K	1060(2335)	925(2040)	670(100)	5.5F
7.00R16LT	14PR	15.5	118/114	K	1320(2910)	1180(2600)	770(110)	5.5F
7.50R16LT	14PR	16.0	122/118	K	1500(3305)	1320(2910)	770(110)	6.00G
8.25R16LT	14PR	16.0	126/122	K	1700(3750)	1500(3305)	670(100)	6.50H
8.25R16LT	16PR	16.0	128/124	K	1800(3970)	1600(3525)	770(110)	6.50H



AR317

PRODUCT INTRODUCTION

1.Deep grooves pattern design offer super wear resistance, which used for light truck on mixed road.
2.The robust blocks design provides strong traction and off-road mobility.
3.Special Tread-compound formula brings excellent self-cleaning capability.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
6.50R16LT	12PR	18.5	110/105	J	1060(2335)	925(2040)	670(100)	5.5F
7.00R16LT	14PR	18.5	118/114	J	1320(2910)	1180(2600)	770(110)	5.5F
7.50R16LT	14PR	19.0	122/118	J	1500(3305)	1320(2910)	770(110)	6.00G
8.25R16LT	16PR	19.0	128/124	F	1800(3970)	1600(3525)	770(110)	6.50H



AR318

PRODUCT INTRODUCTION

1.Suitable for loading truck on ordinary and mixed road.
2.Deep design which can provides strong traction and great wear resistance.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
8.25R20	14PR	20.0	136/134	K	2240(4940)	2120(4675)	830(120)	6.5
8.25R20	16PR	20.0	139/137	K	2430(5360)	2300(5070)	930(135)	6.5
9.00R20	14PR	20.0	141/139	J	2575(5675)	2430(5355)	790(115)	7.0
9.00R20	16PR	20.0	144/142	J	2800(6175)	2650(5840)	900(130)	7.0
10.00R20	18PR	20.0	149/146	J	3250(7160)	3000(6610)	930(135)	7.5
11.00R20	18PR	18.2	152/149	J	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	18.2	154/151	J	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	18.2	156/153	J	4000(8820)	3650(8050)	900(130)	8.5



AR332

PRODUCT INTRODUCTION

1.Used for short distance on bad mixed pavement. It provides good overloading capability and wear resistance.
2.Rib-Lug grooves offer strong traction , superior ground grip.
3.Lower fuel consumption and longer life time.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	17.0	152/149	J	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	17.0	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	17.0	156/153	E	4000(8820)	3650(8050)	900(130)	8.5



AR338

PRODUCT INTRODUCTION

1.Unique tread compound formula and structure make better loading capability, which suitable for all kinds of tough road.
2.Big blocks pattern design provides excellent traction, off-road as well as self-cleaning performance.
3.Reinforced structure provides excellent loading capacity.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	18PR	21.0	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	21.0	156/153	F	4000(8820)	3650(8050)	900(130)	8.5



AR3581

PRODUCT INTRODUCTION

1.Distinctive structure and tread compound formula benefit for superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.
3.Rainforced structure provides better loading capacity.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	16PR	18.5	150/147	J	3350(7385)	3075(6780)	830(120)	8.0
11.00R20	18PR	18.5	152/149	J	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	18.5	154/151	J	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	18.5	156/153	J	4000(8820)	3650(8050)	900(130)	8.5
12R22.5	16PR	18.0	150/147	F	3350(7385)	3075(6780)	830(120)	9.0
12R22.5	18PR	18.0	152/149	F	3550(7830)	3250(7160)	930(135)	9.0



AR366

PRODUCT INTRODUCTION

1.Widened tread design ensures long mileage.
2.Novel appearance with three zigzag grooves with transverse groove pattern provides superior handling performance.
3.Superior carcass wire, excellent carcass durability.
4.Suitable for heavy-duty truck on all wheel position and mixed road.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	16PR	17.5	150/147	H	3350(7385)	3075(6780)	830(120)	8.0
11.00R20	18PR	17.5	152/149	D	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	18.5	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	18.5	156/153	D	4000(8820)	3650(8050)	900(130)	8.5



AR412

PRODUCT INTRODUCTION

1.Used for mixed pavement. Special deep block pattern and strong bead design provide better loading capacity for short distance.
2.Unique tread compound formula obtains resistance to cuts, tearing and chips. It brings excellent braking force as well as wear resistance.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	17.5	152/149	J	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	16.5	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	16.5	156/153	J	4000(8820)	3650(8050)	900(130)	8.5



AR413

PRODUCT INTRODUCTION

1. Strengthen the design of bead bead to improve tire load.
2. High strength steel cord for tire crown can effectively improve the explosion-proof performance of tire.
3. Suitable for short distance, National Road, provincial road and other mixed pavement.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	18PR	17.0	154/151	J	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	17.0	156/153	J	4000(8820)	3650(8050)	900(130)	8.5



AR5157

PRODUCT INTRODUCTION

1.Distinctive reinforced structure and tread compound formula benefit for extra superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	28.0	152/149	A8	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	20PR	26.5	156/153	A8	4000(8820)	3650(8050)	900(130)	8.5



AR527

PRODUCT INTRODUCTION

1.Reinforced bead design offers super loading capability, which suitable for short distance on mining and mixed road.
2.Transverse large blocks pattern design provides excellent ground grip and climbing capability.
3.Provide resistance to tearing and puncturing on tough road, which makes tire life longer.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	18PR	22.9	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	22.9	156/153	D	4000(8820)	3650(8050)	900(130)	8.5



AR525

PRODUCT INTRODUCTION

1.Provide resistance to tearing and puncturing.
2.Suitable for short distance on mining and mixed road.
3.Transverse large block with deep grooves provide excellent ground grip.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
8.25R20	14PR	21.0	136/134	E	2240(4940)	2120(4675)	830(120)	6.5
8.25R20	16PR	21.0	139/137	E	2430(5360)	2300(5070)	930(135)	6.5
9.00R20	14PR	21.0	141/139	E	2575(5675)	2430(5355)	790(115)	7.0
9.00R20	16PR	21.0	144/142	E	2800(6175)	2650(5840)	900(130)	7.0
10.00R20	18PR	21.0	149/146	F	3250(7160)	3000(6610)	930(135)	7.5
11.00R20	16PR	22.0	150/147	F	3350(7385)	3075(6780)	830(120)	8.0
11.00R20	18PR	22.0	152/149	D	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	22.0	154/151	F	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	22.0	156/153	D	4000(8820)	3650(8050)	900(130)	8.5
12R22.5	16PR	24.0	150/147	A8	3350(7385)	3075(6780)	830(120)	9.0
12R22.5	18PR	24.0	152/149	A8	3550(7830)	3250(7160)	930(135)	9.0



AR535

PRODUCT INTRODUCTION

1.Reinforced bead design offers super loading capability, which suitable for short distance on mining and mixed road.
2.Transverse large blocks pattern design provides excellent ground grip and climbing capability.
3.Provide resistance to tearing and puncturing on tough road, which makes tire life longer.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
7.00R16LT	14PR	20.0	118/114	F	1320(2910)	1180(2600)	770(110)	5.50F
7.50R16LT	14PR	20.0	122/118	F	1500(3305)	1320(2910)	770(110)	6.00G
8.25R16LT	16PR	21.0	128/124	F	1800(3970)	1600(3525)	770(110)	6.50H
8.25R20	14PR	21.0	136/134	D	2240(4940)	2120(4675)	830(120)	6.5
8.25R20	16PR	21.0	139/137	D	2430(5360)	2300(5070)	930(135)	6.5
9.00R20	14PR	21.0	141/139	D	2575(5675)	2430(5355)	790(115)	7.0
9.00R20	16PR	21.0	144/142	D	2800(6175)	2650(5840)	900(130)	7.0
10.00R20	18PR	21.0	149/146	D	3250(7160)	3000(6610)	930(135)	7.5
11.00R20	16PR	24.0	150/147	F	3350(7385)	3075(6780)	830(120)	8.0
11.00R20	18PR	24.0	152/149	D	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	24.0	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	24.0	156/153	D	4000(8820)	3650(8050)	900(130)	8.5
12R22.5	16PR	24.0	150/147	A8	3350(7385)	3075(6780)	830(120)	9.0
12R22.5	18PR	24.0	152/149	A8	3550(7830)	3250(7160)	930(135)	9.0



AR415

PRODUCT INTRODUCTION

1.Distinctive structure and tread compound formula benefit for superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.
3.Rainforced structure provides better loading capacity.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	18PR	18.5	154/151	J	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	18.5	156/153	J	4000(8820)	3650(8050)	900(130)	8.5



AR558

PRODUCT INTRODUCTION

1.Deepen pattern groove with anti-stone design, long mileage.
2.Large block pattern structure, special used for construction and mining area.
3.Unique tread compound formula, excellent tear and puncture resistance.
4.High strengthened belt and carcass steel wire, specially for overloading.
5.Suitable for driving wheel on mining and construction.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	18PR	24.0	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	24.0	156/153	D	4000(8820)	3650(8050)	900(130)	8.5



AR565

PRODUCT INTRODUCTION

1.Distinctive reinforced structure and tread compound formula benefit for extra superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
7.00R16LT	14PR	14.5	118/114	D	1320(2910)	1180(2600)	770(110)	5.50F
7.50R16LT	14PR	16.5	122/118	D	1500(3305)	1320(2910)	770(110)	6.00G
8.25R16LT	16PR	17.5	128/124	D	1800(3970)	1600(3525)	770(110)	6.50H



AR585

PRODUCT INTRODUCTION

1.Reinforced bead design offers super loading capability, which suitable for short distance on mining and mixed road.
2.Transverse large blocks pattern design provides excellent ground grip and climbing capability.
3.Provide resistance to tearing and puncturing on tough road, which makes tire life longer.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
10.00R20	18PR	23.0	149/146	F	3250(7160)	3000(6610)	930(135)	7.5
11.00R20	16PR	24.5	150/147	D	3350(7385)	3075(6780)	830(120)	8.0



AR595

PRODUCT INTRODUCTION

1. Thickened crown design can effectively prevent the tire crown surface from being punctured.
2. Unique step-type anti-stone pattern design, to avoid stone stuck into tread groove,and avoid tire crown be damaged.
3. Suitable for mining area, mountainous area and bad road surface.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	16PR	23.0	150/147	A8	3350(7385)	3075(6780)	830(120)	8.0
11.00R20	18PR	23.0	152/149	A8	3550(7830)	3250(7160)	930(135)	8.0



AR599

PRODUCT INTRODUCTION

1.Distinctive structure and tread compound formula benefit for superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
9.00R20	16PR	21.0	144/142	D	2800(6175)	2650(5840)	900(130)	7.0



AR665

PRODUCT INTRODUCTION

1.Distinctive structure and tread compound formula benefit for superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	24.0	152/149	D	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	24.0	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	24.0	156/153	D	4000(8820)	3650(8050)	900(130)	8.5



AR731

PRODUCT INTRODUCTION

1. Low rolling resistance and less fuel consumption.
2. Three circumferential grooves ensure excellent traction,ground grip and wet skid resistance.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R24	18PR	16.0	158/155	K	4250(9370)	3875(8540)	830(120)	8.50
12.00R24	20PR	16.0	160/157	K	4500(9920)	4125(9090)	900(130)	8.50
12R22.5	16PR	16.0	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	16.0	152/149	K	3550(7830)	3250(7160)	930(135)	9.00



AR666

PRODUCT INTRODUCTION

1.Distinctive reinforced structure and tread compound formula benefit for extra superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	24.0	152/149	D	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	24.0	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	24.0	156/153	D	4000(8820)	3650(8050)	900(130)	8.5



AR737

PRODUCT INTRODUCTION

1.Suitable for middle-long distance on good road.
2.Reinforced bead design provides better over loading performance.
3.Special tread compound formula reduces irregular wear.
4.Four circumferential grooves brings better heat-dissipation.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11R22.5	14PR	16.5	144/142	K	2800(6170)	2650(5840)	720(105)	8.25
11R22.5	16PR	16.5	146/143	K	3000(6610)	2725(6005)	830(120)	8.25
12R22.5	16PR	16.5	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	16.5	152/149	K	3550(7830)	3250(7160)	930(135)	9.00



AR667

PRODUCT INTRODUCTION

1.Distinctive structure and tread compound formula benefit for superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	24.0	152/149	D	3550(7830)	3250(7160)	930(135)	8.0
12.00R20	18PR	24.0	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	24.0	156/153	D	4000(8820)	3650(8050)	900(130)	8.5



AR7381

PRODUCT INTRODUCTION

1. Low rolling resistance and less fuel consumption.
2. Three circumferential grooves ensure excellent traction,ground grip and wet skid resistance.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	16.0	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	16.5	152/149	K	3550(7830)	3250(7160)	930(135)	9.00



AR766

PRODUCT INTRODUCTION

1.Suitable for middle-long distance on good road.
2.Reinforced bead design provides better over loading performance.
3.Special tread compound formula reduces irregular wear.
4.Four circumferential grooves brings better heat-dissipation.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	16.0	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	16.0	152/149	K	3550(7830)	3250(7160)	930(135)	9.00



AR815

PRODUCT INTRODUCTION

1.Tread compound formula provides super wear resistance, excellent traction and braking.
2. Suitable for mid-long distance transport for state and highway road.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	17.5	150/147	K	3350(7385)	3075(6780)	830(120)	9.0
12R22.5	18PR	17.5	152/149	L	3550(7830)	3250(7160)	930(135)	9.0



AR777

PRODUCT INTRODUCTION

1.Innovative lug pattern design.
2.Special tread compound formula brings better wear resistance.
3.Suitable for mid-long distance on all kinds of good road.
4.It has superior driving and braking performance as well as ground grip.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	17.0	150/147	L	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	17.0	152/149	L	3550(7830)	3250(7160)	930(135)	9.00



AR818

PRODUCT INTRODUCTION

1.Tread compound formula provides super wear resistance, excellent traction and braking.
2. Deep rib and narrow lug pattern offers excellent heat dissipation, ground grip and wet skid resistance.
3. Suitable for mid-long distance transport for state and highway road.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11R22.5	14PR	22.0	144/142	K	2800(6170)	2650(5840)	720(105)	8.25
11R22.5	16PR	22.0	146/143	K	3000(6610)	2725(6005)	830(120)	8.25
12R22.5	16PR	22.5	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	22.5	152/149	K	3550(7830)	3250(7160)	930(135)	9.00



AR778

PRODUCT INTRODUCTION

1. Low rolling resistance and less fuel consumption.
2. Three circumferential grooves ensure excellent traction,ground grip and wet skid resistance.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	17.5	150/147	L	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	17.5	152/149	L	3550(7830)	3250(7160)	930(135)	9.00



AR819

PRODUCT INTRODUCTION

1.Super wearable tread formula provides long mileage of low fuel consumption.
2.Excellent stability and self cleaning performance.
3.Suitable for mid-long distance on state and highway road.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	22.0	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	22.0	152/149	K	3550(7830)	3250(7610)	930(135)	9.00
315/80R22.5	18PR	20.0	154/151	K	3750(8270)	3450(7610)	830(120)	9.00
315/80R22.5	20PR	20.0	157/154	K	4125(8270)	3750(8270)	900(130)	9.00



AR868

PRODUCT INTRODUCTION

1.Tread compound formula provides super wear resistance, excellent traction and braking.
2. Suitable for mid-long distance transport for state and highway road.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	18.5	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	18.5	152/149	K	3550(7830)	3250(7160)	930(135)	9.00



AR869

PRODUCT INTRODUCTION

1. Special tread compound formula reduces irregular wear, extends tire life time.
2. Used for mid-short distance on mixed pavement.
3.Upgraded pattern design provides better ground grip and anti-slippery performance.
4. Excellent heat dissipation guarantees safer driving.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	17.0	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	17.0	152/149	K	3550(7830)	3250(7160)	930(135)	9.00
13R22.5	18PR	17.5	154/151	J	3750(8270)	3450(7610)	830(120)	9.75



AR878

PRODUCT INTRODUCTION

1.Innovative pattern design applied for mid-short distance on mixed road obtains superb loading capability.
2.Ultra-large block design provides super resistance to tearing and puncturing brings excellent traction and braking force enhances stability and reduces irregular wear.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	18.0	150/147	F	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	18.0	152/149	F	3550(7830)	3250(7160)	930(135)	9.00
315/80R22.5	18PR	18.0	154/151	K	3750(8270)	3450(7610)	830(120)	9.00
315/80R22.5	20PR	18.0	157/154	K	4125(9100)	3750(8270)	900(130)	9.00



AR888

PRODUCT INTRODUCTION

1.Innovative pattern design applied for mid-short distance on mixed road obtains superb loading capability.
2.Ultra-large block design provides super resistance to tearing and puncturing brings excellent traction and braking force enhances stability and reduces irregular wear.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	20.0	150/147	D	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	20.0	152/149	D	3550(7830)	3250(7160)	930(135)	9.00



AR898

PRODUCT INTRODUCTION

1. The large tread pattern design on the tire crown surface increases the tire grip performance.
2. Deepen the pattern design, prolong the service life of the tire and reduce the use cost.
3. The medium and short distance special tire in vacuum tire is suitable for mixed road.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	20.0	150/147	D	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	20.0	152/149	D	3550(7830)	3250(7160)	930(135)	9.00



AR900

PRODUCT INTRODUCTION

1.Widened tread design and wear-resistant tread formula bring long mileage.
2.Four zigzag grooves with special shallow groove design provide excellent handling.
3.Optimized tire contour design through mechanical model brings low rolling resistance and fewer fuel consumption.
4.Suitable for long-distance heavy-duty truck on all wheel positions and good roads such as highways.

Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	14.4	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	14.4	152/149	J	3550(7830)	3250(7160)	930(135)	9.00

PRODUCT INTRODUCTION

1.Suitable for middle-long distance on good road.
2.Reinforced bead design provides better over loading performance.
3.Special tread compound formula reduces irregular wear.
4.Four circumferential grooves brings better heat-dissipation.



AR916




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	16.0	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	16.0	152/149	J	3550(7830)	3250(7160)	930(135)	9.00

PRODUCT INTRODUCTION

1. Three longitudinal zigzag grooves and open shoulder design provides excellent traction and handling.
2.High strength skeleton material adopted to effectively resist external impact and improve loading capacity.



AW001



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
10.00R20	18PR	16.0	149/146	K	3250(7160)	3000(6610)	930(135)	7.50

PRODUCT INTRODUCTION

1.Special pattern design and tread compound formula provide excellent heat dissipation, long mileage and good wear resistance.
2.Suitable for mid-long distance on all kinds of good road.

AR918



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	16.0	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	16.0	152/149	J	3550(7830)	3250(7160)	930(135)	9.00

PRODUCT INTRODUCTION

1.Classic three circumferential pattern design provides superior overall handling performance.
2.Unique semi-open shoulder groove design offers optimum heat dissipation.
3.Special tread formula provides excellent wear resistance and tear resistance.
4.Variable pitch pattern design brings low noise and comfort performance.
5.Suitable for short and medium distance truck on all wheel positions and mixed pavement.



AW002




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R24	18PR	14.5	158/155	K	4250(9370)	3875(8540)	830(120)	8.5
12.00R24	20PR	14.5	160/157	K	4500(9920)	4125(9090)	900(130)	8.5
11R22.5	14PR	14.5	144/141	K	2800(6170)	2650(5840)	720(105)	8.25
11R22.5	16PR	14.5	146/143	K	3000(6610)	2725(6005)	830(120)	8.25
315/80R22.5	18PR	15.5	154/151	K	3750(8270)	3450(7610)	830(120)	9.0
315/80R22.5	20PR	15.5	157/154	K	4125(9100)	3750(8270)	900(130)	9.0

PRODUCT INTRODUCTION

1.Distinctive reinforced bead ensure excellent added loading capacity.
2.Unique tread compound formula offers long mileage.
3.Advanced tubeless tire with long service life.



AW003



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11R22.5	14PR	14.5	144/141	K	2800(6170)	2650(5840)	720(105)	8.25
11R22.5	16PR	14.5	146/143	K	3000(6610)	2725(6005)	830(120)	8.25
12.00R24	18PR	14.8	158/155	K	4250(9370)	3875(8540)	830(120)	8.5
12.00R24	20PR	14.8	160/157	K	4500(9920)	4125(9090)	900(130)	8.5



AW767

PRODUCT INTRODUCTION

1.Suitable for middle-long distance on good road.
2.Reinforced bead design provides better over loading performance.
3.Special tread compound formula reduces irregular wear.
4.Four circumferential grooves brings better heat-dissipation.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11R22.5	14PR	14.5	144/141	M	2800(6170)	2650(5840)	720(105)	8.25
11R22.5	16PR	14.5	146/143	M	3000(6610)	2725(6005)	830(120)	8.25
295/80R22.5	16PR	15.0	150/147	M	3350(7390)	3075(6780)	830(120)	9.0
295/80R22.5	18PR	15.0	152/149	M	3550(7830)	3250(7160)	900(130)	9.0
315/80R22.5	18PR	15.0	154/151	L	3750(8270)	3450(7610)	830(120)	9.0
315/80R22.5	20PR	15.0	157/154	L	4125(9100)	3750(8270)	900(130)	9.0



AW787

PRODUCT INTRODUCTION

1.Innovative lug pattern design.
2.Special tread compound formula brings better wear resistance.
3.Suitable for mid-long distance on all kinds of good road.
4.It has superior driving and braking performance as well as ground grip.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11R22.5	14PR	14.5	144/141	M	2800(6170)	2650(6780)	720(105)	8.25
11R22.5	16PR	14.5	146/143	M	3000(6610)	2725(6005)	830(120)	8.25
295/80R22.5	16PR	15.5	150/147	M	3350(7390)	3075(6780)	830(120)	9.00
295/80R22.5	18PR	15.5	152/149	M	3550(7830)	3250(7160)	900(130)	9.00



AR113

PRODUCT INTRODUCTION

1.Deep and compacted channels for better water dissipation.
2.Improved rubber compound delivers heat control and low overall abrasion wear.
3.Super traction and braking characteristics.
4.Surface tread designed for long life cycle.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
385/65R22.5	18PR	15.5	158	K	4250(9370)	3875(8540)	830(120)	11.75
385/65R22.5	20PR	15.5	160	K	4500(9930)	4125(9090)	900(130)	11.75



AW901

PRODUCT INTRODUCTION

1.Unique tread compound formula.
2.Super wear resistance, excellent traction and braking performance.
3.Deep narrow lug pattern, ground grip and wet skid resistance, excellent heat dissipation.
4.Single -Steering transverse block design, superior traction performance.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11R22.5	14PR	21.0	144/141	K	2800(6170)	2650(5840)	720(105)	8.25
11R22.5	16PR	21.0	146/143	K	3000(6610)	2725(6005)	830(120)	8.25



AW902

PRODUCT INTRODUCTION

1.Aggressive shoulder block pattern, solid middle pattern groove and excellent transverse pattern groove can provide excellent tear resistance and cutting resistance, and outstanding traction performance on tough road.
2.Deepen and widen pattern design leads excellent one-time driving mileage.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R24	18PR	20.0	158/155	F	4250(9370)	3875(8540)	830(120)	8.5
12.00R24	20PR	20.0	160/157	F	4500(9920)	4125(9090)	900(130)	8.5



AW819

PRODUCT INTRODUCTION

1.Super wearable tread formula provides long mileage of low fuel consumption.
2.Excellent stability and self cleaning performance.
3.Suitable for mid-long distance on state and highway road.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11R22.5	14PR	19.5	144/141	L	2800(6170)	2650(5840)	720(105)	8.25
11R22.5	16PR	19.5	146/143	L	3000(6610)	2725(6005)	830(120)	8.25
295/80R22.5	16PR	19	150/147	M	3350(7390)	3075(6780)	830(120)	9.00
295/80R22.5	18PR	19	152/149	M	3550(7830)	3250(7160)	900(130)	9.00

PRODUCT INTRODUCTION

1.Widened tread design ensures long mileage.
2.Novel appearance with three zigzag grooves with transverse groove pattern provides superior handling performance.
3.Superior carcass wire, excellent carcass durability.
4.Suitable for heavy-duty truck on all wheel position and mixed road.



AR377



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	18PR	18.5	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	18.5	156/153	D	4000(8820)	3650(8050)	900(130)	8.5

PRODUCT INTRODUCTION

1.The pattern is of mixed design, with ultra wide driving surface, wear resistance, cutting resistance and pricking resistance;
2. Super strength carcass, reinforced design of sidewall, better load resistance;
3. Suitable for light truck models, mixed roads, medium and low speed driving.



AR156小全钢



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
6.00R13	10PR	12.8	98/94	D	750(1655)	670(1480)	560(80)	4.50B
6.00R14	10PR	12.8	100/96	D	800(1765)	710(1565)	560(80)	4 1/2J
6.00R15	10PR	12.8	101/97	D	825(1820)	730(1610)	560(80)	4 1/2J

PRODUCT INTRODUCTION

1. The large tread pattern design on the tire crown surface increases the tire grip performance.
2. Deepen the pattern design, prolong the service life of the tire and reduce the use cost.
3. The medium and short distance special tire in vacuum tire is suitable for mixed road.



AR399



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
9.00R20	14PR	20.0	141/139	D	2575(5675)	2430(5355)	790(115)	7.0
9.00R20	16PR	20.0	144/142	D	2800(6175)	2650(5840)	900(130)	7.0
10.00R20	16PR	20.0	146/143	D	3000(6610)	2725(6010)	830(120)	7.5
10.00R20	18PR	20.0	149/146	D	3250(7160)	3000(6610)	930(135)	7.5

PRODUCT INTRODUCTION

1. The pattern incorporates new design concepts and adopts variable pitch pattern design;
2. Low noise, innovative sidewall design, beautiful and exquisite;
3. Suitable for small light truck vehicles and better roads; And suitable for high-speed vehicles.



AR158小全钢



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
6.00R13	10PR	10.0	98/94	D	750(1655)	670(1480)	560(80)	4.50B
6.00R14	10PR	10.0	100/96	D	800(1765)	710(1565)	560(80)	4 1/2J
6.00R15	10PR	10.0	101/97	D	825(1820)	730(1610)	560(80)	4 1/2J

PRODUCT INTRODUCTION

1.Unique tread compound formula and structure make better loading capability, which suitable for all kinds of tough road.
2.Big blocks pattern design provides excellent traction, off-road as well as self-cleaning performance.
3.Reinforced structure provides excellent loading capacity.



AR418



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	18PR	17.5	154/151	D	3750(8270)	3450(7610)	830(120)	8.5
12.00R20	20PR	17.5	156/153	J	4000(8820)	3650(8050)	900(130)	8.5

PRODUCT INTRODUCTION

1.The carcass is reinforced to improve the bearing capacity of the tire;
2.Optimize the design of toe mouth to improve the anti air, anti explosion and anti crack ability of toe mouth;
3.Special mine tread rubber formula, tire wear resistance, gnawing resistance and pricking resistance;
4.Strong horizontal pattern design, strong power.



AR5158



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	20PR	24.5	156/153	D	4000(900)	3650(930)	/	8.5

PRODUCT INTRODUCTION

1.The optimized tread compound formula not only improves the puncture resistance of the tire, but also improves the heat dissipation performance of the tire and effectively increases the service life of the tire;

2.Large block pattern design for strong traction.



AR581



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	24.0	152/149	D	3550(930)	3250(930)	/	8.0
12.00R20	20PR	24.5	156/153	D	4000(900)	3650(900)	/	8.5

PRODUCT INTRODUCTION

1.The carcass uses super strong steel wire and the crown explosion-proof layer is designed to improve the impact resistance of the tire;

2.Special formula for mine, tire anti cutting, no block falling, more suitable for bad industrial and mining roads.



AR597



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	24.5	152/149	D	3550(930)	3250(930)	/	8.0
12.00R20	20PR	24.5	156/153	D	4000(900)	3650(900)	/	8.5

PRODUCT INTRODUCTION

1.Large block and deep groove give the tire better grip;

2.The step design in the groove makes the tire have better stone removal and self-cleaning;

3.The optimized formula ensures that the tire is puncture resistant and does not collapse, so that the tire has a longer service life.



AR587



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	24.0	152/149	D	3550(930)	3250(930)	/	8.0
12.00R20	20PR	24.0	156/153	D	4000(900)	3650(900)	/	8.5

PRODUCT INTRODUCTION


1.Large pattern blocks can effectively improve the puncture and cutting resistance of tires, which is more suitable for bad industrial and mining roads;

2.Double step and boss design can effectively prevent sharp objects from damaging the base rubber of the pattern groove bottom;

3.Timely pop the stones out of the pattern groove to improve self-cleaning.



AR596



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	26.0	156/153	D	4000(900)	3650(900)	/	8.5

产品介绍

1. A light-duty tubeless tire used in the guide wheel position, suitable for long-distance use such as high-speed and national roads;

2. It has the characteristics of puncture resistance, safety and wear resistance. The tire tread adopts a high-saturation symmetrical pattern design, which greatly improves the driving force and grip performance of the tire, followed by excellent traction performance and drainage performance, which makes its comprehensive performance at high speed even better;

3. The cushion rubber and tread adopts a unique wear-resistant formula, which provides excellent mileage and wear resistance, not only low heat generation, low thermal resistance, but also environmental protection and fuel saving, and better bearing performance.



AR216



规格	层级	花纹深度 (mm)	负荷指数	速度级别	最大负荷KG(LBS.)		充气压力 (PSI)	标准轮毂
					单	双		
12R22.5	16PR	15.5	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	15.5	152/149	K	3550(7830)	3250(7160)	930(135)	9.00

产品介绍

1. It is suitable for guide wheel position, used in light-duty tubeless tires on high-speed, national roads and other long-distance roads. It has the characteristics of puncture resistance, safety and wear resistance.

2. The tread uses a highly saturated pattern design, which has better driving performance and grip performance;

3. Specialized design of the sidewall, extremely high flexural resistance and strong comfort, thus prolonging the service life of the tire;

4. The use of low heat build-up tread base rubber and deepened grooves can not only reduce heat build-up, but also make it have excellent durability, environmental protection and fuel saving.



AR218




规格	层级	花纹深度 (mm)	负荷指数	速度级别	最大负荷KG(LBS.)		充气压力 (PSI)	标准轮毂
					单	双		
12R22.5	16PR	15.5	150/147	K	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	15.5	152/149	K	3550(7830)	3250(7160)	930(135)	9.00



AR586

PRODUCT INTRODUCTION

1.Distinctive reinforced structure and tread compound formula benefit for extra superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
7.50R16LT	14PR	20.0	122/120	F	1510(3330)	1440(3170)	700(102)	6.00G



AR5255

PRODUCT INTRODUCTION

1.Provide resistance to tearing and puncturing.
2.Suitable for short distance on mining and mixed road.
3.Transverse large block with deep grooves provide excellent ground grip.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12.00R20	18PR	22.0	154/151	D	3750(8270)	3450(7610)	830(120)	8.5



HL618

PRODUCT INTRODUCTION

1.Suitable for loading truck on ordinary and mixed road.
2.Deep design which can provides strong traction and great wear resistance.




Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	20.0	152/149	J	3750(8270)	3450(7610)	830(120)	8.0



AR513

PRODUCT INTRODUCTION

1. Strengthen the design of bead bead to improve tire load.
2. High strength steel cord for tire crown can effectively improve the explosion-proof performance of tire.
3. Suitable for short distance, National Road, provincial road and other mixed pavement.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
9.00R20	14PR	15.2	141/139	F	3575(5675)	2430(5355)	790(115)	7.0



HL658

PRODUCT INTRODUCTION

1.Distinctive structure and tread compound formula benefit for superior loading capacity on all kinds of tough road.
2.The large blocks pattern design ensures excellent traction, off-road mobility and self-cleaning ability.
3.Rainforced structure provides better loading capacity.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
11.00R20	18PR	20.0	152/149	J	3750(8270)	3450(7610)	830(120)	8.00
12.00R20	20PR	20.0	152/149	J	4000(8820)	3650(8050)	900(130)	8.50



WR221

PRODUCT INTRODUCTION

1.Innovative lug pattern design.
2.Special tread compound formula brings better wear resistance.
3.Suitable for mid-long distance on all kinds of good road.
4.It has superior driving and braking performance as well as ground grip.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	17.0	150/147	L	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	17.0	152/149	L	3550(7830)	3250(7160)	930(135)	9.00



WR223

PRODUCT INTRODUCTION

1. Low rolling resistance and less fuel consumption.
2. Three circumferential grooves ensure excellent traction,ground grip and wet skid resistance.



Size	Ply Rating	Tread Depth (mm)	Load Index	Speed Symbol	KG(LBS.)Load Capacity		Pressure kPa(PSI)	Standard Rim
					Single	Dual		
12R22.5	16PR	17.5	150/147	L	3350(7385)	3075(6780)	830(120)	9.00
12R22.5	18PR	17.5	152/149	L	3550(7830)	3250(7160)	930(135)	9.00

COMPANY HISTORY



2000

Hubei Aulice Tyre Co.,Ltd., Formerly known as Wuhan Aulice Tyre Co., Ltd., which was established in 2000.



2012

The company settled in Yangxin County Economic Development Zone in April 2012,with a total investment of 2 billion RMB.



2013

Aulice certified by national quality management system "CCC"in Oct 2013.



2014

Passed American quality management system certification "DOT" in Aug 2014.

2015

In 2015, passed "GCC", issued by Cooperation Council for the Arab States of the Gulf in Jan and "ISO9001:2000" in June.

With the establishing of it's footprint across the global, Aulice's operating income reached 146.23 million RMB in 2015.



2016



In 2016 awarded "high-tech enterprise" by Huangshi Technical Supervision Bureau.



COMPANY HISTORY

COMPANY HISTORY

2017

In 2017 was selected as "gold seed" reserve listed enterprises in Hubei Province, at the same time the Department of Foreign Trade officially operated.



2018

In 2018, the production output reached 1.5 million pieces and the sales volume reached to 1.456 Million pieces, the sales amounted to more than 1.4 Billion RMB, and the taxes paid amounted to 59.79 Million RMB.



2019




As of March 2019, the company's independent production of the many main brands,"Aulice, Vanlustone, santian, Jiasibao, and Qunying" and 94 sizes, 67 kinds of patterns, 17 R & D patents, 30 registered trademarks. On the same year.Aulice expanded a new TBR production line and OTR production line, which create 300 thousands TBR tire and 150 thousands OTR tires per year.

In Nov 2019, Aulice invest another new plant Hubei Jiashun Tire Co., Ltd in Xianning city which will bring 3 million sets of high-performance all-steel radial tire.

2020

Set up the Internet technology team in September 2019, predominantly dedicated to the development of online B2B and B2C platforms.

Simultaneously, dawning involved in big data collection, AI intelligent algorithms, which will greatly improve the user experience, help users to scientifically use tires and assist to develop new products concurrently. It will make Aulice become smarter and more intelligent.

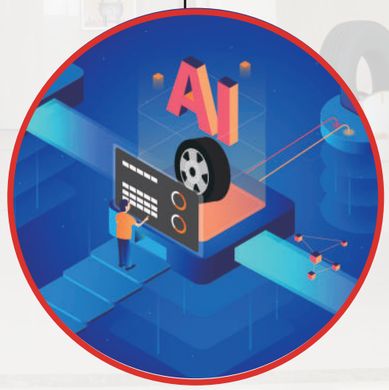

In the future



Aulice plans to be listed on the board in Shenzhen Stock Exchange within 2023. Now Aulice is preparing the relevant materials of IPO to the CSRC, and accomplish it by the end of 2023.

In the future Aulice will strive to become the No.1 intelligent tire manufacturer with its internet+ concept of mega data technology and AI solution.



COMMON CAUSES OF TIRE DAMAGE



Waterproof Line Crack

Use of poor rim or the pressure is relatively insufficient, leading to the stress to move down and waterproof line crack.



Flange Cut

Rim deformation or put the tyres in improper place when mounting, tire bead is cut by flange.



Bead Blasting

Badly overloading or sharp turn, single tyre gets huge stress so lead to bead blasting.



Tread Puncture

The tread is punctured by sharp objects when driving on bad road.



Tread Puncture

The tread is punctured by sharp objects when driving on bad road.



Pattern Root Torn Badly

The base rubber of the pattern is thinner than other parts, When driving on gravel road with high air pressure or sharp turn, pattern root will be torn badly.

COMMON CAUSES OF TIRE DAMAGE




Bead Twisted And Deformed To Crack

When using the tyre under low pressure and heavy load for a long time, the flexing point moves down and the bead is twisted and deformed to crack.



Pattern Block Cracking Or Dropping Off

When driving on bad road, the shoulder is pushed and scratched by the objects such as the roadbed or try to pass in force, which will cause pattern block cracking or dropping off.

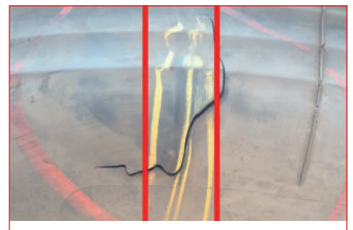


Strip-Shaped Bump

The tire crown is punctured by sharp objects such as stones, bolts and nails, etc during driving, forming a strip-shaped bump



Tire Crown Impact Blast

Tire crown impact blast is caused by the impaction of foreign object on the tread when driving under high pressure,high speed and heavy load.

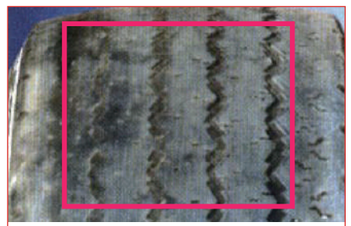

Eccentric Wear Of Tread

The wear,deformation and displacement of the mechanical parts make the camber of the vehicle being changed,or the repairing and/or calibration of vehicle is not correct, which makes the tread not be vertical to the road surface so causes the eccentric abrasion.This kind of wear is fast.



The Carcass Was Crushed By Running Without Air

In the process of driving, the tyre is punctured by foreign objects or the valve core leaks, resulting in tyre pressure loss. When the brake is not timely, the tyre sidewall is crushed by the rim.



Foreign Material Between Side Wall

When vehicle is traveling with twin tyre,there are some foreign materials between the two tyres,where the steel cords of the side wall may deform and cause such damage.



Shoulder Separation

Using the tire under low pressure for a long time cause shoulder separation.



Tire Burst

Severe overload during driving, high air pressure or sharp turn, resulting in excessive instantaneous force on the sidewall and blasting.