Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd

Interactive Player






Product Details

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen



Infrared Multitouch

High precision, infrared touch positioning technology, accurate command, timely feedback, millisecond extremely fast response, achieve super positioning ability and precise tracking, trigger.

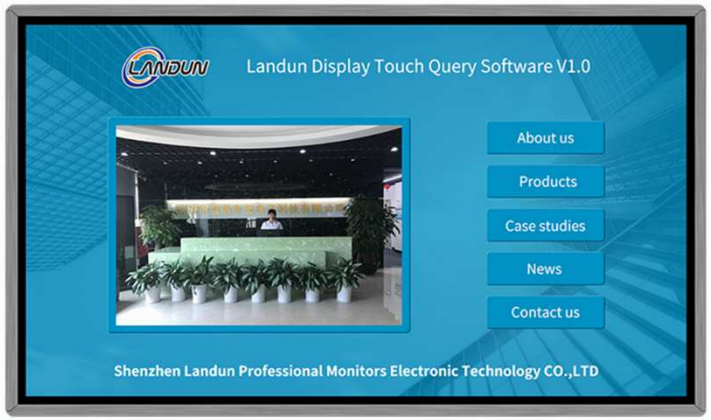

Touch Query Software

Support query content, custom link web site, suitable for information query, navigation, self-service and other industries.



Massive Application Download

Android/Windows operating system can be used in a large number of applications, supporting Internet access, movies, games, office software and so on.



Ergonomic design

With the people-oriented design concept, Blue Shield Touch Inquiry Integrative Machine has designed a better reading and writing posture to meet the requirements of human activities.


Product Parameters

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Display Parameters	**Model**	LD-PC4301Y	LD-PC4901Y	LD-PC5501Y
	Display Area	534.5(H)*947(W)	606(H)*1076(W)	682.4(H)*1211.6(W)
	Resolution	1080*1920	1080*1920	1080*1920
	Proportion	9:16	9:16	9:16
	Brightness	300 cd/㎡	300 cd/㎡	300 cd/㎡
	Chroma	16.7M	16.7M	16.7M
	Contrast Ratio	4000:1	4000:1	4000:1
	Viewing Angle	89/89/89/89(up/down/left/right)		
Touchscreen Parameters	**Touch Specifications**	Infrared touch/Capacitive Touch		
	Touch Method	10 points		
	Touch Deviation	≤2mm		
	Touch Points	≥10 points		
	Positioning Accuracy	≥Ø5mm		
	Light Transmittance	≥95%		
	Calibration Method	System comes with calibration, software calibration		
	Power Supply	USB		
System Configuration	**Operation System**	Windows7/10(Optional)		
	CPU	I5(I3,I7Optional)		
	Ram	4G(Optional)		
	Hard Disk	120G(Optional)		
	Graphics Card	Integrated		
	Output Port	VGA、HDMI、USB2.0*4、RJ45&RJ11、Audio I/O interface、RS232		
	Network	Wired network/WIFI Wireless Network		
	3G/4G	Optional		
Other	**Input Voltage**	AC 110V ~ 240V 50/60HZ	AC 110V ~ 240V 50/60HZ	AC 110V ~ 240V 50/60HZ
	Power	≦120W	≦150W	≦180W
	Physical Dimension	1785mm*593mm*52mm	1855mm*667.5mm*52mm	1905mm*744mm*52mm
	Packing Size	Body:1825mm*153mm*679mm	Body:1895mm*153mm*753mm	Body:1945mm*153mm*830mm
		Base:614mm*65mm*420mm	Base:687mm*65mm*470mm	Base:763mm*65mm*500mm
	Net Weight	38Kg	45Kg	51Kg
	Gross Weight	42Kg	48Kg	55Kg

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen


Application and Package

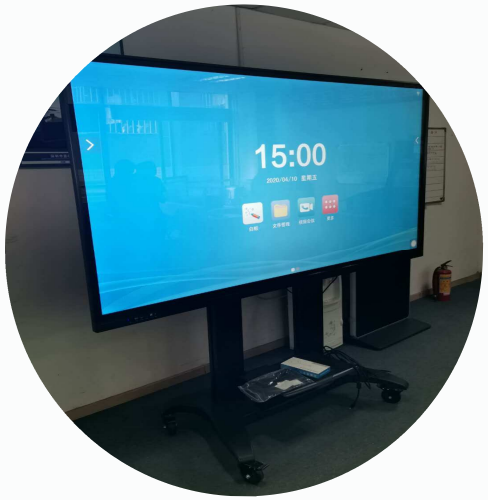

Meeting room



Library

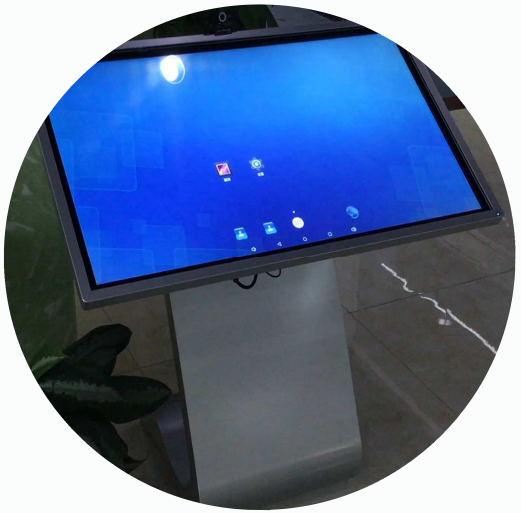

Shopping mall



Hospital



Package:

Pearl Cotton+Carton
+Wooden case/frame