Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd

Smart Conference Whiteboard



Product Details

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

FHD/4K Resolution



2k resolution　　4K,3840*2160

Support Android and Windows dual system



Windows system　　Android system

Wall mount　　Floor stand



Remote conference

No two-way delay, high transmission stability. Achieve high-efficiency meetings, zero-distance on-site meeting effect, greatly improve the efficiency of communication and collaboration.





Product Parameters

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Display Parameters	**Model**	LD-H550	LD-H650	LD-H750	LD-H860
	Panel Size	55 Inch	65 Inch	75 Inch	86 Inch
	Resolution	1920*1080	3840*2160	3840*2160	3840*2160
	Brightness	350cd/㎡	400cd/㎡	450cd/㎡	450cd/㎡
	Contrast Radio	1400:1	1400:1	1400:1	1400:1
	Pixel Pitch	0.372*0.372mm	0.372*0.372mm	0.372*0.372mm	0.372*0.372mm
	Display Area	1209.6(H)*680.4(V)	1428.48(H)* 803.52(V)	1646.5(H)*924.7(V)	1897(H)*1068(V)
	Viewing Angle	89/89/89/89 (Min.)(CR≥10)	89/89/89/89 (Min.)(CR≥10)	89/89/89/89 (Min.)(CR≥10)	89/89/89/89 (Min.)(CR≥10)
System Configuration	**Operating System**	Android 6.0 (2G+16G)			
	CPU	ARM Cortex A53,1.4GHz,Quad-core,ARM Mali 720MP2			
	Ram	2G(Optional)			
	Driving/TV Board Scheme	Android + PC dual system solution,MSD6A648			
	Internet Connected	WIFI,Bluetooth,Wireless Hotsopt			
	Input Interface	RF Signal Input,DP,AV,YPbPr,VGA-AUDIO,VGA,USB2.0,HDMI,SD Expansion Card Slot,RS232 Serial Port,RJ45			
	Output Interface	AV,VGA,EAPRHONE,SPDIF,TouchUSB			
	Support Format	RM、MPEG2、MPEG4、H.265、RMVB、MOV、MJPEG、VC1、FLV,WMA、MP3、M4AJPG,BMP,PNG			
Others	**Input Voltage**	AC 110V ~ 240V 50/60HZ	AC 110V ~ 240V 50/60HZ	AC 110V ~ 240V 50/60HZ	AC 110V ~ 240V 50/60HZ
	Max Power	≦150W	≦170W	≦180W	≦240W
	Standby Power	0.5W	0.5W	0.5W	0.5W
	Operating Temperature	-10℃-55℃	-10℃-55℃	-10℃-55℃	-10℃-55℃
	Stored Temperature	-20℃-60℃	-20℃-60℃	-20℃-60℃	-20℃-60℃
	Net Weight	40KG	45KG	58KG	70KG
	Gross Weight	50KG	50KG	70KG	85KG
	Bare Metal Size(L*W*H)	1259*98*771mm (With wall mount bracket)	1514.8*132.6*934.7mm (With wall mount bracket)	1736.2*145.3*1059.7mm (With wall mount bracket)	1990*123*1200mm (With wall mount bracket)
	Packing Dimension(L(W*H)	1410*198*921mm	1665*235*1080mm	1885*245*1225mm	2145*260*1360mm
	Shell Material	Aluminum profile / sheet metal	Aluminum profile / sheet metal	Aluminum profile / sheet metal	Aluminum profile / sheet metal
	Shell Color	Black	Black	Black	Black

Application and Package

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen









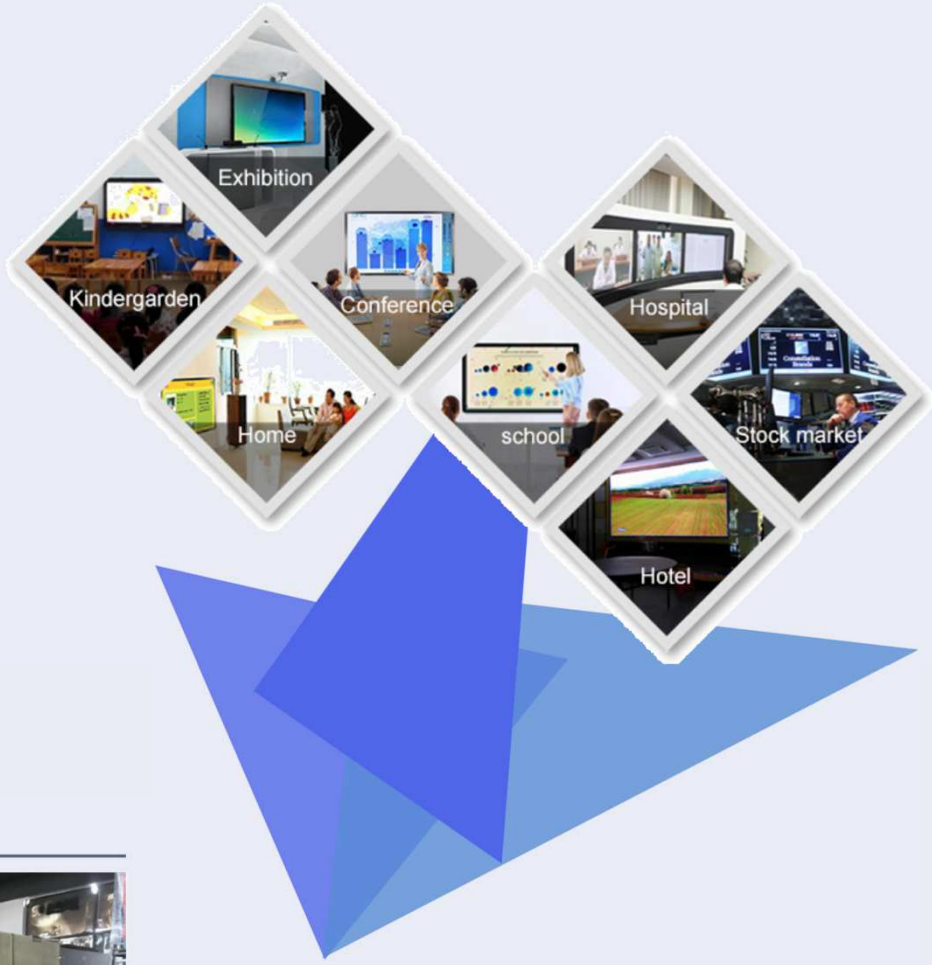

Packing & Delivery



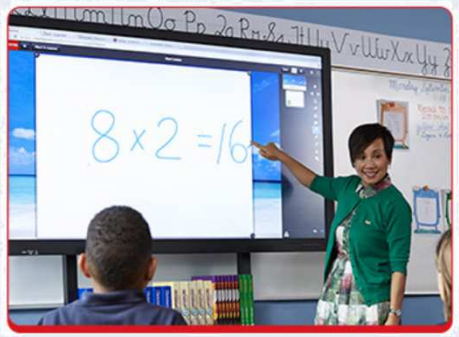

High quality honeycomb box with inside EVA foam protectorBulk shipment with high quality wooden box