Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd

Interactive Player





Product Details

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen



Infrared Multitouch

High precision, infrared touch positioning technology, accurate command, timely feedback, millisecond extremely fast response, achieve super positioning ability and precise tracking, trigger.

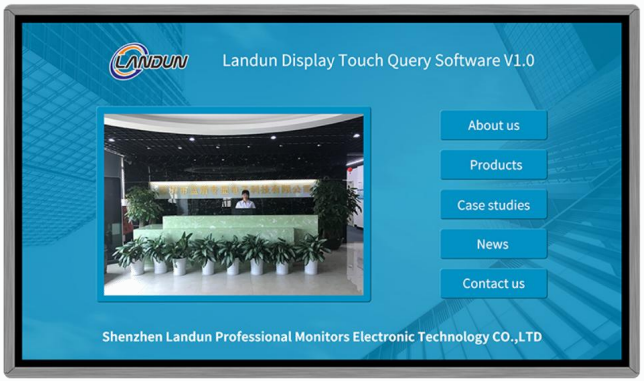

Touch Query Software

Support query content, custom link web site, suitable for information query, navigation, self-service and other industries.



Massive Application Download

Android/Windows operating system can be used in a large number of applications, supporting Internet access, movies, games, office software and so on.



Ergonomic design

With the people-oriented design concept, Blue Shield Touch Inquiry Integrative Machine has designed a better reading and writing posture to meet the requirements of human activities.

Product Parameters

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Display Parameters	**Model**	LD-PC6501Y	LD-PC7501Y	LD-PC8601Y
	Display Area	809(H)*1434(W)	929.5(H)*1652.8(W)	1064.8(H)*1895.3(W)
	Resolution	1080*1920	1080*1920	3840*2160
	Proportion	9:16	9:16	9:16
	Brightness	300 cd/㎡	350 cd/㎡	400 cd/㎡
	Chroma	16.7M	16.7M	16.7M
	Contrast Ratio	4000:1	3500:1	3000:1
	Viewing Angle	89/89/89/89(up/down/left/right)		
Touchscreen Parameters	**Touch Specifications**	Infrared touchCapacitive Touch		
	Touch Method	Click, drag, zoom in, zoom out		
	Touch Deviation	≤2mm		
	Touch Points	≥10 points		
	Positioning Accuracy	≥Ø5mm		
	Light Transmittance	≥95%		
	Calibration Method	System comes with calibration, software calibration		
	Power Supply	USB		
System Configuration	**Operation System**	Windows7/10 (Optional)		
	CPU	I5(I3,I7Optional)		
	Ram	4G(Optional)		
	Hard Disk	120G(Optional)		
	Graphics Card	Integrated		
	Output Port	VGA、HDMI、USB2.0*4、RJ45&RJ11、Audio I/O interface、RS232（Optional）		
	Network	Wired network/WIFI Wireless Network		
	3G/4G	Optional		
Others	**Input Voltage**	AC 110V～240V 50/60HZ	AC 110V～240V 50/60HZ	AC 110V～240V 50/60HZ
	Power	≦220W	≦150W	≦180W
	Physical Dimension	2055mm*870mm*52mm	2212.9mm*999.5mm*95.4mm	2352.9mm*1135.8mm*95.4mm
	Packing Size	Body:2095mm*153mm*953mm Base:888mm*65mm*520mm	Body:2260mm*180mm*1100mm	Body:2400mm*180mm*1240mm
	Net Weight	63Kg	95Kg	110Kg
	Gross Weight	67Kg	117Kg	134Kg

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Application and Package

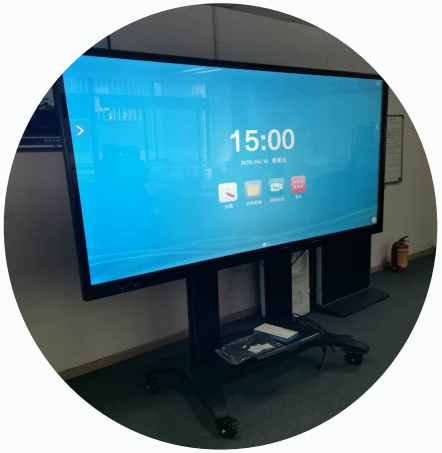

Meeting room



Library



Shopping mall



Hospital



Package:

Pearl Cotton+Carton
+Wooden case/frame