Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd

Led Car Top Screen



Product Details

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Double-sided
Double-sided, could reach more people as possible

IP65
IP65 Waterproof design, suitable for outdoor application



High Brightness
3,000~5,000nits brightness adjustable, make the display content visible even under sunshine

Easy Maintenance
Easy to mount onto taxi tops and convenient to remove it when necessary





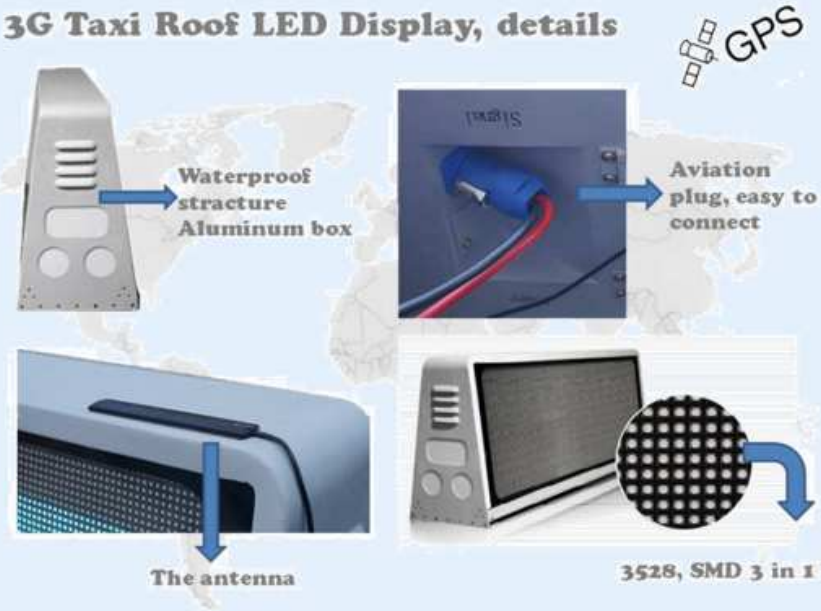

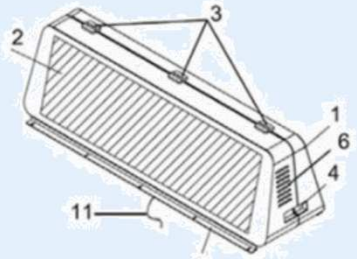

1 --- LED display Cabinet
2 --- LED display Panel
3 --- Hinge
4 --- Lock
5 --- Installation of chassis
6 --- Dc Fan
7 --- Air window
8 --- Air pressure bar
9 --- Cable hole
10 --- Screw hole
11 --- Power Cable

FIG 1

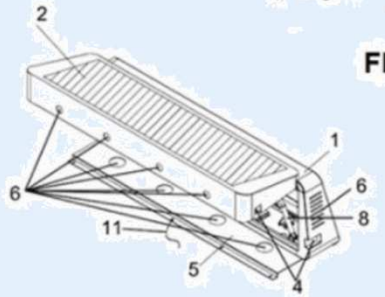

FIG 2

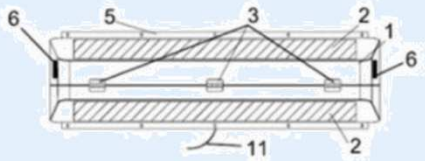

FIG 3

Product Parameters

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Module Parameters	Model	P2.94	P3.33	P3.84
	Pixel Structure	DS1515 Triple LED	DS2121 Triple LED	DS2121 Triple LED
	Pixel Pitch	2.0mm	2.5mm	3mm
	Module Resolution	68*68=4624	60*60=3600	52*52=2704
	Module Size	200*200mm	200*200mm	200*200mm
	Module Weight	0.45KG	0.45KG	0.45KG
	Module Input Voltage	5V	5V	5V
	Module Maximum Current	≤5.5A	≤5.5A	≤5.5A
	Module Power Consumption of Module	≤17.5W	≤17.5W	≤17.5W
Cabinet Parameters	Box Module Composition	2*4(W*H)	2*4(W*H)	2*4(W*H)
	Cabinet Resolution	136*272(W*H)	120*240(W*H)	104*208(W*H)
	Box Size	400*800*50mm	400*800*50mm	400*800*50mm
	Box Area	0.32㎡	0.32㎡	0.32㎡
	Box Weight	7.2KG	7.2KG	7.5KG
	Box Pixel Density	36992dots/㎡	28800dots/㎡	21632dots/㎡
	Flatness of Box Body	≤0.5mm	≤0.5mm	≤0.5mm
	Maintenance Method	Post-maintenance	Post-maintenance	Post-maintenance
	Cabinet Material	Iron box	Iron box	Iron box
Optical parameters	Single-point Brightness Correction	Yes	Yes	Yes
	Single-point Chromaticity Correction	Yes	Yes	Yes
	White Balance Brightness	600nits	600nits	600nits
	Color Temperature	9000-13000 Adjustable		
	Viewing Angle	140°/120°(Horizontal/Vertical)	140°/120°(Horizontal/Vertical)	140°/120°(Horizontal/Vertical)
	Brightness/Chromaticity Uniformity	≥99%	≥99%	≥99%
	Contrast	5000:1	5000:1	5000:1

Application and Packing

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen











Carton Box



Wooden Case