Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd

LCD Poster Advertising Player





Product details

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

43 inch LCD laquered board

- support video play
- support Picture carousel
- support remote control



178° FULL VIEW ANGLE

No brush color from any point of view,horizontal
or vertical screen can be viewed in all directions



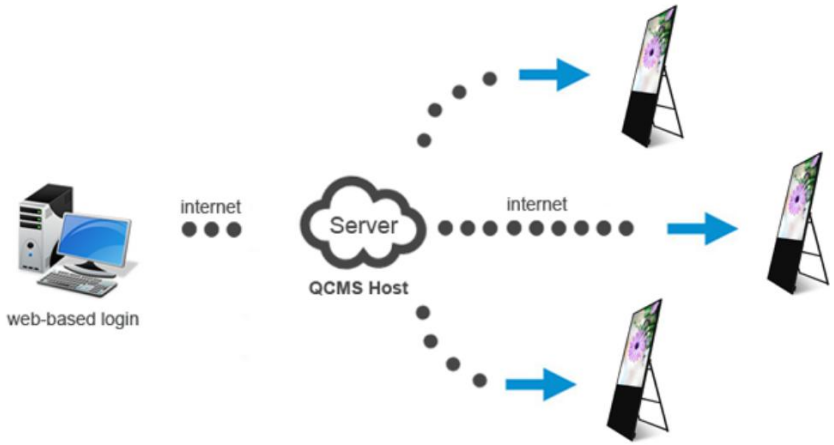

Industrial design Thickness 37mm

Slim & Portable
Full viewing angle,FHD resolution



Product Parameters

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Display Parameters	**Model**	LD-G320GA	LD-G430GA	LD-G490GA	LD-G550GA
	Size	32 Inch	43 Inch	49 Inch	55 Inch
	Display Area	697mm×392mm	941mm×530mm	1074mm×604mm	1209mm×680mm
	Proportion	16:9	16:9	16:9	16:9
	Resolution	1920*1080	1920*1080	1920*1080	1920*1080
	Brightness	2000cd/㎡	2500cd/㎡	2500cd/㎡	2500cd/㎡
	Contrast Ratio	4000:1	4000:1	4000:1	4000:1
	Viewing Angle	178°(Horizontal/ Vertical)	178°(Horizontal/ Vertical)	178°(Horizontal/ Vertical)	178°(Horizontal/Vertical)
System Configuration	**Operation System**	Android 5.1/7.1(Optional)			
	Main Chip	RK3288、Quad core ARM Cortex A17 、Highest 1.8GHz			
	Ram	2G(Optional)			
	Built-in Storage	Onboard 8GB(Optional)			
	Extended Storage	TF Card			
	Support Video	MPG，AVI，RMVB，MOV，MP4，RM，TS，FLV、MPEG、MKV、WMV			
	Support Picture	MP、JPEG、PNG、GIF			
	Support Audio	Support left and right channel output, built-in dual channel 8R/10W power amplifier			
	External Interface	HDMI Output、RJ45、USB*2			
Exterior	**Exterior Color**	Black, white can be customized	Black, white can be customized	Black, white can be customized	Black, white can be customized
	Protective Glass	6mm Tempered explosion-proof glass	5mm Tempered explosion-proof glass	6mm Tempered explosion-proof glass	6mm Tempered explosion-proof glass
	Physical dimension				
	NW				
	Installation Method	Floor standing	Floor standing	Floor standing	Floor standing
Working Environment	**Cooling System**	Patented heat dissipation structure combination + aluminum military-grade heat dissipation substrate (optional for air conditioning heat dissipation)			
	Brightness Control	Automatic photosensitive system			
	Temperature Control	Smart fan cooling, automatic temperature sensing			
	Working Temperature	-35°C to +55°C	-35°C to +55°C	-35°C to +55°C	-35°C to +50°C
	Working Humidity	10% to 90%	10% to 90%	10% to 90%	10% to 90%
	Working Voltage	AC 110V～240V 50/60HZ	AC 110V～240V 50/60HZ	AC 110V～240V 50/60HZ	AC 110V～240V 50/60HZ
	Power	≦210W	≦320W	≦350W	≦400W



Application and Package

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen


Hotel


Bank


Celebration


Restaurant


Cinema


Shopping mall









