Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd


Outdoor Wall-mount Advertising Player




Product details

Shenzhen Landun Professional Monitors Electronic Technology Co., Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Bao'an shenzhen


Intelligent Split Screen

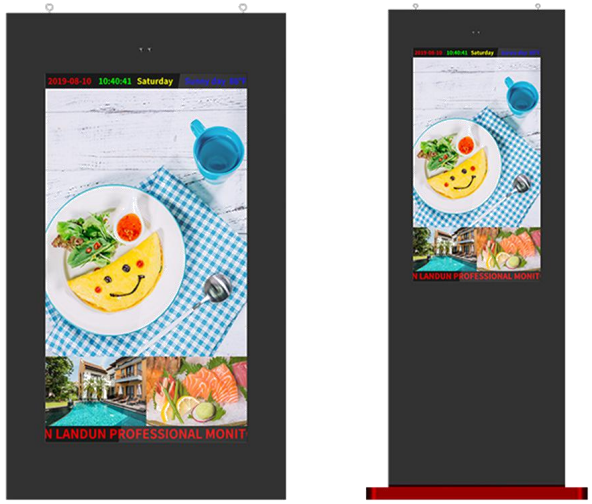

Viewing Angel

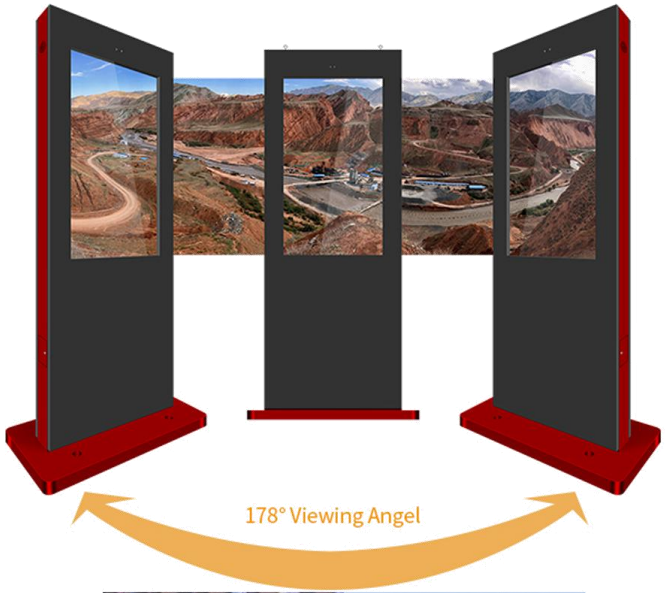

Cooling System

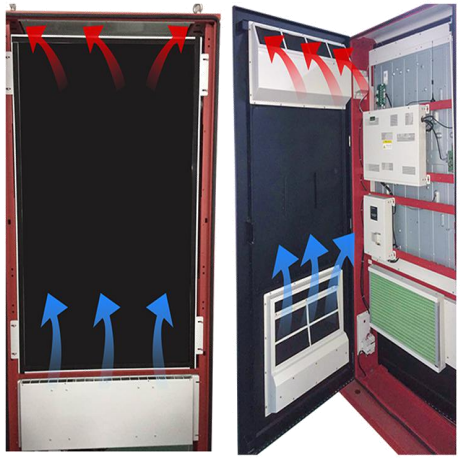

Circulating duct, strong heat dissipation

The temperature control system can adjust the internal temperature and humidity of the equipment to ensure that the equipment operates in the environment of -40 degrees.



Automatic Brightness Adjustment

High definition and high brightness, able to adapt to various environments, can automatically adjust the screen brightness according to the light intensity around the machine.

Product Parameters

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd.
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Display Parameters	Model	LD-G320W	LD-G430W	LD-G490W	LD-G550W
	Size	32 Inch	43 Inch	49 Inch	55 Inch
	Display Area	697mm×392mm	941mm×530mm	1074mm×604mm	1209mm×680mm
	Proportion	16:9	16:9	16:9	16:9
	Resolution	1920*1080	1920*1080	1920*1080	1920*1080
	Brightness	2000cd/㎡	2500cd/㎡	2500cd/㎡	2500cd/㎡
	Contrast Ratio	4000:1	4000:1	4000:1	4000:1
	Viewing Angle	178°(Horizontal/ Vertical)	178°(Horizontal/ Vertical)	178°(Horizontal/ Vertical)	178°(Horizontal/Vertical)
System Configuration	Operation System	Android 5.1/7.1(Optional)			
	Main Chip	RK3288、Quad core ARM Cortex A17 、Highest 1.8GHz			
	Ram	2G(Optional)			
	Built-in Storage	Onboard 8GB(Optional)			
	Extended Storage	TF Card			
	Support Video	MPG，AVI，RMVB，MOV，MP4，RM，TS，FLV、MPEG、MKV、WMV			
	Support Picture	MP、JPEG、PNG、GIF			
	Support Audio	Support left and right channel output, built-in dual channel 8R/10W power amplifier			
	External Interface	HDMI Output、RJ45、USB*2			
Exterior	Protection Level	IP55	IP55	IP55	IP55
	Exterior Color	Black, gray, white can be customized	Black, gray, white can be customized	Black, gray, white can be customized	Black, gray, white can be customized
	Protective Glass	6mm Tempered explosion-proof glass	5mm Tempered explosion-proof glass	6mm Tempered explosion-proof glass	6mm Tempered explosion-proof glass
	Physical dimension	950mm*680mm*230mm	1180mm*830mm*200mm	1325mm*855mm*200mm	1460mm*990mm*200mm
	NW	60Kg	70Kg	90Kg	110Kg
	Installation Method	Wall Mounted	Wall Mounted	Wall Mounted	Wall Mounted
Working Environment	Cooling System	Patented heat dissipation structure combination + aluminum military-grade heat dissipation substrate (optional for air conditioning heat dissipation)			
	Brightness Control	Automatic photosensitive system			
	Temperature Control	Smart fan cooling, automatic temperature sensing			
	Working Temperature	-35°C to +55°C	-35°C to +55°C	-35°C to +55°C	-35°C to +50°C
	Working Humidity	10% to 90%	10% to 90%	10% to 90%	10% to 90%
	Working Voltage	AC 110V～240V 50/60HZ	AC 110V～240V 50/60HZ	AC 110V～240V 50/60HZ	AC 110V～240V 50/60HZ
	Power	≤210W	≤320W	≤350W	≤400W

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Application and Package







