Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd

LED Pole Screen



Product details

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

OUTDOOR POLE LED SCREEN

Outdoor IP65 waterproof iron cabinet (single side or double side)



- Remote cluster control
- Synchronous display
- Optional - Synchronous stereo
- Automatic brightness adjustment
- Optional - Remote power off control

① Quick Connection
② Good Ventilation
③ Front Accessible
④ Back Maintainence






EASY MAINTENANCE

control fault data in real time point-to- point maintenance

IP65 Waterproof	High light	Weather resistant
Smart cooling	Energy saving	High data security



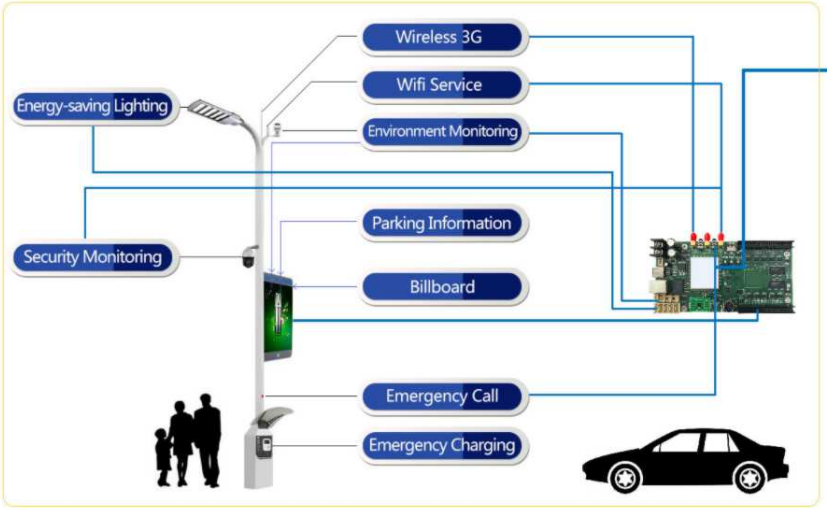

Product Parameters

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

	Model	P2.94	P3.33	P3.84
Module Parameters	Pixel Structure	DS1515 3 in 1 LED	DS2121 3 in 1 LED	DS2121 3 in 1 LED
	Pixel Pitch (mm)	2.0	2.5	3.0
	Module Size (mm)	200×200	200×200	200×200
	Module Resolution (W*H)	68*68=4624	60*60=3600	52*52=2704
	Module Weight (kg)	0.45	0.45	0.45
	Module Input Voltage (V)	5	5	5
	Module Maximum Power Consumption (W)	≤17.5	≤17.5	≤17.5
	Module Maximum Current (A)	≤5.5	≤5.5	≤5.5
Cabinet Parameters	Cabinet Module Composition (W*H)	2*4	2*4	2*4
	Cabinet Resolution (W*H)	136×272	120×240	104×208
	Cabinet Size (mm)	400×800×120	400×800×120	400×800×120
	Cabinet Area (m2)	0.32	0.32	0.32
	Cabinet Weight (kg)	7.2	7.2	7.5
	Cabinet Pixel Density (dots/m2)	36992	28800	21632
	Cabinet Flatness (mm)	≤0.5	≤0.5	≤0.5
	Maintenance Method	Rear Maintenance	Rear Maintenance	Rear Maintenance
	Cabinet Material	Iron Cabinet	Iron Cabinet	Iron Cabinet
Optical Parameters	Single-point Brightness Correction	YES	YES	YES
	Single-point Chromaticity Correction	YES	YES	YES
	White Balance Brightness (nits)	600	600	600
	Color Temperature	9000~13000 adjustable		
	Brightness/Chromaticity Uniformity	≥99%	≥99%	≥99%
	Contrast Ratio	5000:1	5000:1	5000:1
	Viewing Angle (horizontal/vertical°)	140/120	140/120	140/120

Application and Package

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen














Wooden Box Package

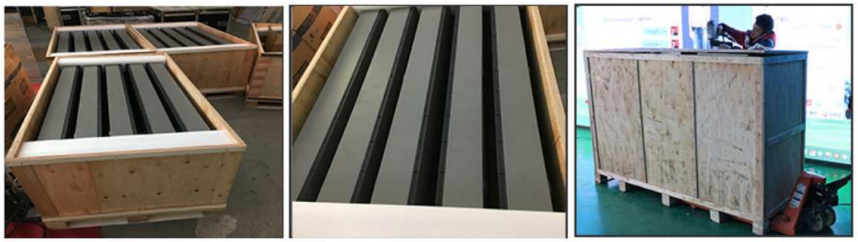

LED module package

