Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd

Outdoor LED Screen



Product Details

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

IP65 Level Waterproof

The display adopts THE waterproof and dustproof back cover, and fixed by screws. The frame is treated with pressure-injection waterproof glue, and the screen has complete sealing performance,adapt to all kinds of bad weather, and superb workmanship and systematic testing ensure the quality of the product,so can guarantee product quality for customers



Ultra-wide Viewing Angle high refresh rate


The surface-mounted lamp beads have a large perspective，then use high-precision equipment and advanced technology to produce, unique anti-electromagnetic wave treatment, distributed scanning technology, modular settings, making reliability and stability higher,wider horizontal and vertical viewing angles, stable performance, and wide playback content






High Stability

Advanced chip, constant current drive!

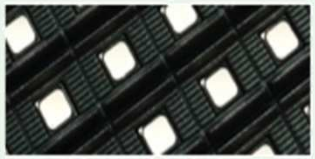


Low Dead Light Rate

High-quality lamp beads, strictly encapsulated!

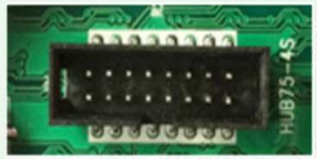

Protective Fence

Easy installation, no deformation of the pin

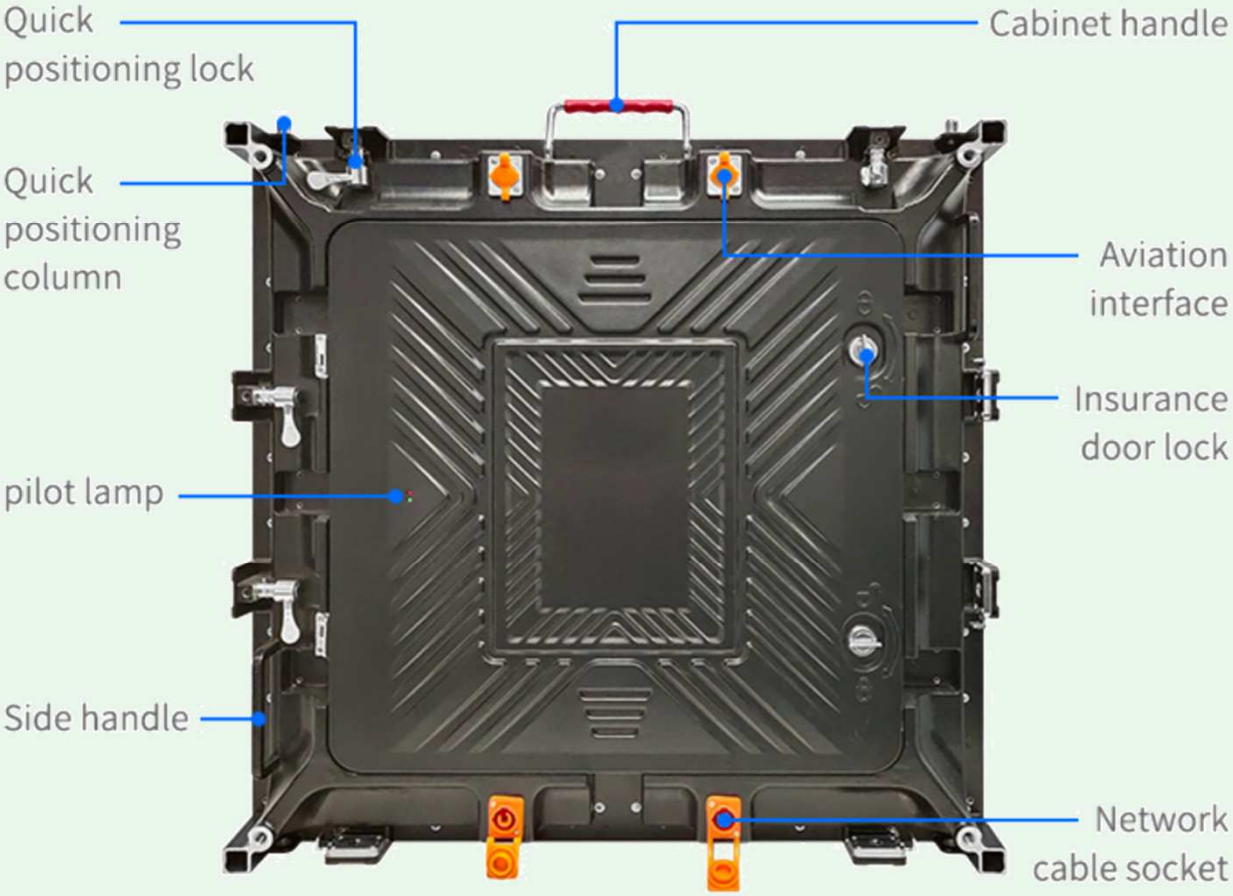

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Product Parameters


Model	P4	P5	P6	P8
Pixel Pitch	4mm	5mm	6.667mm	8mm
Pixel Density	62500Dots/㎡	40000Dots/㎡	22500Dots/㎡	15625Dots/㎡
Pixel Structure	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Lamp Type	SMD1921	SMD1921	SMD3535	SMD3535
Module Size	320mm*160mm	320mm*160mm	320mm*160mm	320mm*160mm
Module Resolution	80*40=3200	64*32=2048	48*24=1152	40*20=800
Drive Mode	1/10 Constant current drive	1/8 Constant current drive	1/6 Constant current drive	1/5Constant current drive
Kit Materials	Polycarbonate PC material	Polycarbonate PC material	Polycarbonate PC material	Polycarbonate PC material
Input Voltage	4-4.5V	4.2-5V	4.2-4.5V	4-4.5V
Max Current	7.7A±0.3A	7.7A±0.3A	7.7A±0.3A	7A±0.3A
Module Power	≤37.8W	≤37.8W	≤33.6W	≤30.6W
Module Weight	0.46kg±0.01kg	0.48kg±0.01kg	0.53kg±0.01kg	0.51kg±0.01kg

Shenzhen Landun Professional Monitors Electronic Technology Co.,Ltd
Add:5th Floor, Building A2, Longma Technology Industrial City, Shixin Community, Shiyan Street, Baoan shenzhen

Application And Package



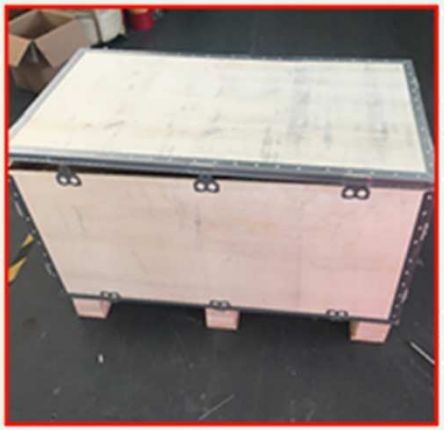


Carton+Wooden case