Revisions			
REV.	ECN NO.	Description	DATE
A			

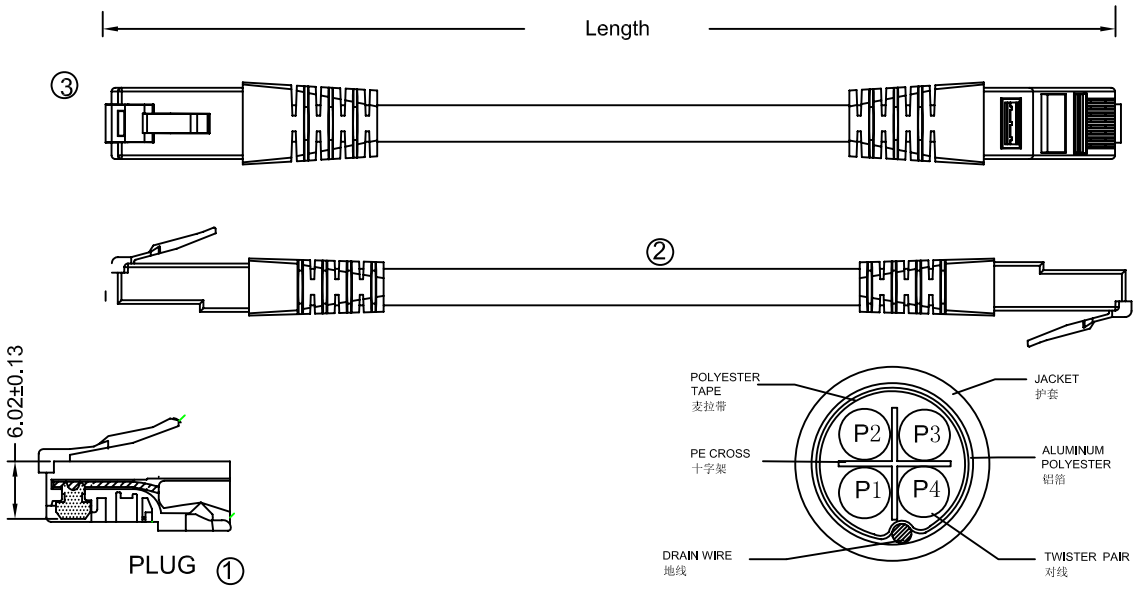



Pin Assignment:

Pos. No.	T568B WIRING	Pos. No.
1	Orange	1
2	White/Orange	2
3	Green	3
6	White/Green	6
4	White/Blue	4
5	Blue	5
7	Brown	7
8	White/Brown	8
SHIELDED		SHIELDED

NOTES:

1. All cable 100% testing, any open,miswiring, short & intermittent are not permitted.
2. After crimping the distance between the bottom of contact and the top surface of plug are 5.90~6.146 mm.
3. The patch cable must be tested with CHANNEL test of Fluke DTX-1800 .
4. RoHS compliant .

P1 Blue&white/blue
P2 Orange&white/orange
P3 Green&white/green
P4 Brown&white/brown

NO.	ITEM	QTY	DESCRIPTION
④			
③	OVERMODE		48P PVC
②	CABLE	1PCS	CAT 6A FTP 26AWG*4P Stranded Cable Jacket: PVC, OD:6.0±0.2mm.
①	RJ45 PLUG	2PCS	SHIELDED RJ-45 8P8C Contact: Phosphor Bronze 3u or 6u or 15u 50u ". UL94V-0

METRIC	ANGLES
X.X±0.20	X.X° ±0.5°
XX.X±0.50	XX.X° ±1°
XXX.X±1.0	

SYMBOL	Q'TY	DESCRIPTION
☒		CRITICAL DIMENSION
☐	2	MAJOR DIMENSION

RFQ NO.		DWG NO.		TITLE: CAT 6A FTP PATCH CORD	REV. A / UNIT: mm
DATE:	07.22.2015	SHEET	1 OF 1		SCALE: Free
CUSTOMER:		PartNo:			P/N:
					Drawn :
					Approval: