


11*0651** **


流水号
膜厚
材质

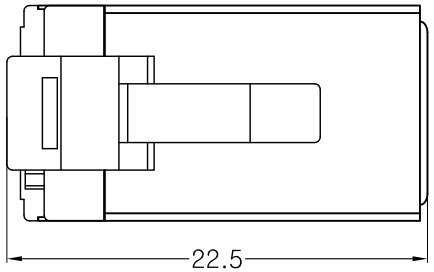


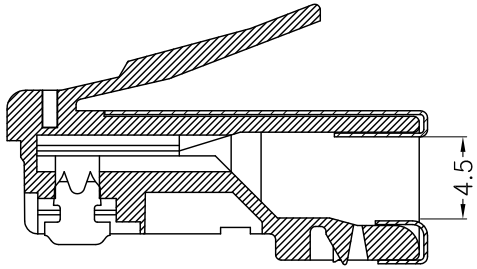


SECTION A-A

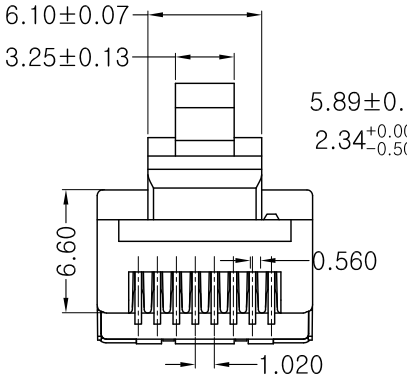

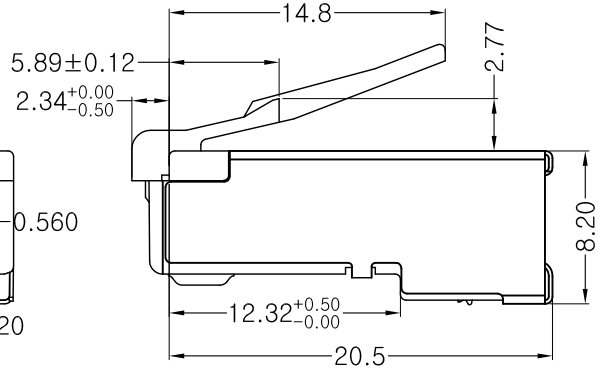

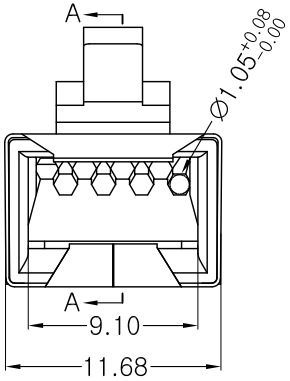

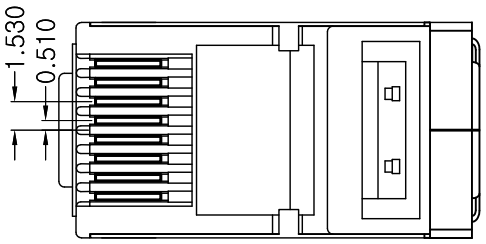

印章

变更 CHANGE			
版本 EDITI	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

NOTES:
1. Operation Temperature:-40℃～+85℃.
2. Electrial Characteristics:
   2.1>Rated Current:125V AC,1.5A@25℃.
   2.2>Contact Resistance:20mΩ Max.
   2.3>Insulation Resistance:500MΩ Min,100V DC/min.
   2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
3. Mechanical Characteristics:
   3.1>Insertion Force & Withdrawal Force:30N Max.
   3.2>Durability:750 cycles Min.
4. Environmental compliance:
   4.1>the products are compliant with the RoHS, and REACH etc.

说明:
1. 使用温度范围:-40℃～+85℃.
2. 电气特性:
   2.1>电压、电流规格:125V AC 1.5A@25℃.
   2.2>接触电阻:20mΩ 最大.
   2.3>绝缘电阻:500MΩ 至少 100V DC/分钟.
   2.4>耐电压:1000V AC/分钟,无击穿.
3. 机械特性:
   3.1>插入力&拔出力:30N 最大.
   3.2>耐久性:750次至少.
4. 环保符合性:
   4.1>产品符合RoHS，REACH等环保规格.

编号 NO.	名称 NAME	数量 QTY	料号 PART NO.	品名规格 DESCRIPTION	材质 MATERIAL
1	Modular Plug	屏蔽壳 Shell 1PCS	43*20**09	方孔 Square hole Au: G/F"□ 1u"□ 3u"□ Ni:80u"□	黄铜□ Brass 铁□ Spcc
		金片 Contacts 8PCS	/	2叉 2Prongs□ 3叉 3Prongs□ G/F"□ 1u"□ 3u"□ 6u"□ 15u"□ 30u"□ 50u"□ OTHER□	黄铜 Brass□ 磷铜 Phosphor copper□
		胶壳 Housing 1PCS	21*0651**	CAT6/FTP胶壳/长身/一件式/线孔1.05mm	94V-2□ 94V-0□

宁波汉图电子有限公司
Ningbo Honto Electronics Co.,Ltd

产品编号 PRODUCT NO	11*0651****	品名规格 DESCRIPTION	CAT6/FTP水晶头/长身/一件式/线孔1.05mm					页次 SHEET.	1/1
材质 MATERIAL	/	单位 UNIT	mm	比例 SCALE	1:1	图号 DWG NO	MP24006	版本 EDITI	A/0
尺寸公差表 DIMENSIONAL TOLERANCE X.X ±0.2 X.XX ±0.10 X.XXX ±0.05 ANGLE ±2°		第三视角法 THIRD ANGLE PROJECTION				制图 DRAWN	刘志文	日期 DATE	2017.08.01
						核对 CHECK		日期 DATE	
						批准 APPRO.		日期 DATE	