A1RFRD10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

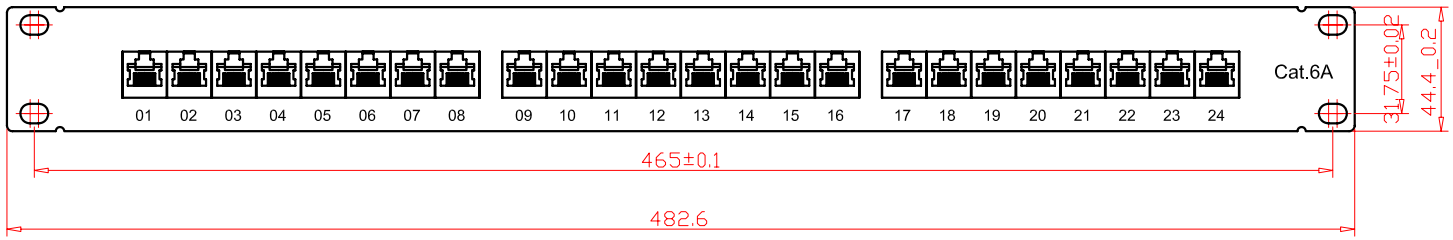

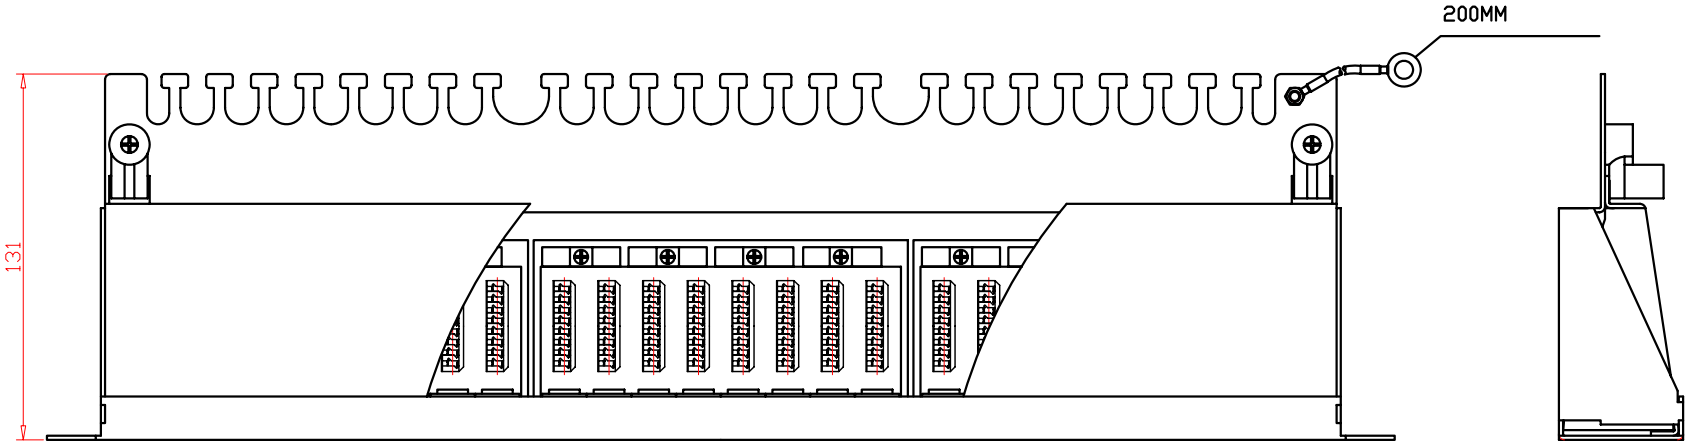

NOTES:
ELECTRICAL:
1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN
5. DIELECTRIC STRENGTH: 750 VAC RMS 60HZ, 1MIN.

MECHANICAL:
1. HOUSING MATERIAL: PBT+15%GF UL94V-0.
2. PANEL FRAME: CARBON STEEL ,POWDER COATING IN BLACK COLOR
3.IDC MATERIAL :PC UL94V-0
CONTACT: PHOSPHOR BRONZE WITH NICKEL PLATING

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM	
.0 ± 0.15	±
.00 ± 0.075	±
.000 ± 0.05	±

ANGLES ± 0.5

THIRD ANGLE PROJECTION

DFTD	SUSAN	DATE 6/5/07'
CHKD	STONE	DATE 6/15/07'
MFD		DATE
APPV	JASON	DATE 6/15/07'

MATERIAL :

QT'Y :

FINISH:

SCALE : 1:2

Shenzhen Copperled Technology Co.,Ltd

TITLE
24 PORTS C6A PATCH PANEL

DRAWING NO. /PART NO.	SIZE	REV
	A3	10

DO NOT SCALE DRAWING | SHEET 1 OF 1