CAT6A Class EA RJ45 plug to be assembled in the field

· FTP TYPE: 1 piece Design

· Easy Assembly - easily terminated in the field in 2 minute without any special tools

. Operation temperature:-40℃ to 60℃, Relative humidity: 85%(30℃), Air pressure: 70-106Kpa.

. Gold Plated Phosphor Bronze Blade: phosphor bronze and gold plating (3~50uinch), mating durability not less than 750 cycles ;

. Anti-burn performance: product made from Kirsite \ PC

. Intermediate resistance: no more than 20m ohm in normal atmosphere pressure (not including bulk resistor) ;


. Insulated resistance: no less than 1,000M ohm in normal atmosphere pressure ;


. Retention strength: 7.7kg between jack and plug.


. Label: clear label to ensure easy to management ;


· Wire Connection: Stranded wire AWG 24/7 to 22/7


· Wire Connection: Solid wire AWG 24/1 to 22/1








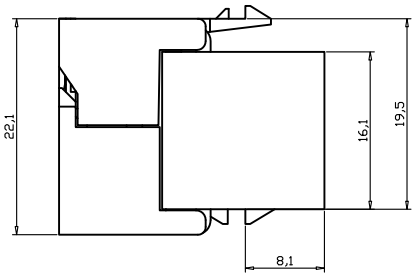





TITLE:	INCH	MM	CopperLed	
.X	.015	.30		
.XX	.010	.10	TITLE: FTP Cat.6A Keystone Jack	
.XXX	.005	.05		
DRAWN BY	MA		P/N: CL-KJ-C6A17	
CHECK BY			SCALE 1:1 / UNIT MM	REV 1.2
APPD BY			SHEET 1/1 / DATE 2021/11/11	DWG NO: