HOTEC

HAND DRYER

SENSOR OPERATED	POPULAR
	
Reference: 11.301 white	Reference: 11.302 white

COMPONENTS & MATERIALS

·ABS thermoplastic one-piece cover white finish.
·High speed brush motor.
·Strong, vandal proof and build without edges.
·Induction motor incorporating a safety thermal cut-off.
·Element incorporates a safety thermal cut-off.
·PP aluminium centrifugal single inlet fan wheel.
·Easy maintenance.
·Dimension: 267 high x 182 wide x 120 deep mm. (item:11.301)
·Dimension: 250 high x 238 wide x 230 deep mm. (item:11.302)

TECHNICAL SPECIFICATIONS

· **Material**	ABS
· **Cover thickness**	2.8 mm thick
· **Voltage/Frequency**	AC220V, 50/60Hz
· **r.p.m.**	3600/2800
· **Total power**	1200W/1800W
· **Motor power**	50W/60W
· **Consumption**	5.2A
· **Air velocity**	11m/s
· **Air temperature**	50-80℃
· **Noice level**	<70dB
· **Protection level**	IPX1

CERTIFICATE

CE RoHS

TECHNICAL DRAWING

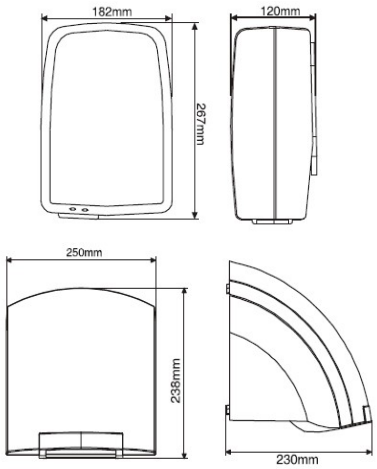

Tel: +86 571 888 685 70 Fax: +86 571 888 685 71
hotec@cnhotec.com www.cnhotec.com