HOTEC

HAND DRYER

SENSOR OPERATED	HIFLOW PLUS



Reference: 11.221
steel
white enamelled coating



Reference: 11.222
AISI 304 stainless steel
brigh



Reference: 11.223
AISI 304 stainless steel
satin

COMPONENTS & MATERIALS

·One-piece cover.
·High speed brush motor.
·Strong, vandal proof and build without edges.
·Universal brush motor incorporating a safety thermal cut-off.
·Element incorporates a safety thermal cut-off.
·Aluminium centrifugal double inlet fan wheel.
·360° revolving nozzle in chrome-plated zamak.
·Easy maintenance.
·Dimension: 245 high x 280 wide x 215 deep mm.


TECHNICAL SPECIFICATIONS

· **Material**	steel or AISI 304 stainless steel
· **Cover thickness**	1.0 mm thick
· **Voltage/Frequency**	AC220V, 50/60Hz
· **r.p.m.**	6200
· **Total power**	2300W
· **Motor power**	250W
· Consumption	10A
· **Air velocity**	23m/s
· **Air temperature**	50-80℃
· **Noice level**	<78dB
· **Protection level**	IPX1

CERTIFICATE

CE RoHS

TECHNICAL DRAWING

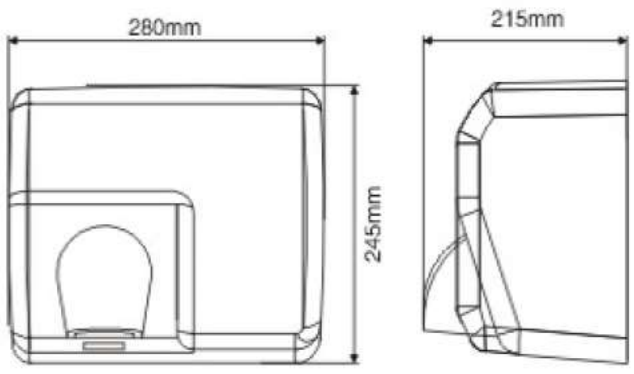

Tel: +86 571 888 685 70 Fax: +86 571 888 685 71
hotec@cnhotec.com www.cnhotec.com