HOTEC

HAND DRYER

SENSOR OPERATED	SPEED



Reference: 11.241
ABS
white



Reference: 11.242.W
steel
white enamelled coating



Reference: 11.242.B
steel
black enamelled coating

COMPONENTS & MATERIALS

·One-piece cover.
·High speed brush motor.
·Strong, vandal proof and build without edges.
·Universal brush motor incorporating a safety thermal cut-off.
·Element incorporates a safety thermal cut-off.
·Aluminium centrifugal double inlet fan wheel.
·Easy maintenance.
·Dimension: 291 high x 221 wide x 190 deep mm.

TECHNICAL SPECIFICATIONS

· **Material**	ABS or steel
· **Cover thickness**	3.0/1.0 mm thick
· **Voltage/Frequency**	AC220V, 50/60Hz
· **r.p.m.**	20000
· **Total power**	1800W
· **Motor power**	550W
· **Consumption**	7.8A
· **Air velocity**	85m/s
· **Air temperature**	50-80℃
· **Noice level**	<78dB
· **Protection level**	IPX1

CERTIFICATE

CE

TECHNICAL DRAWING

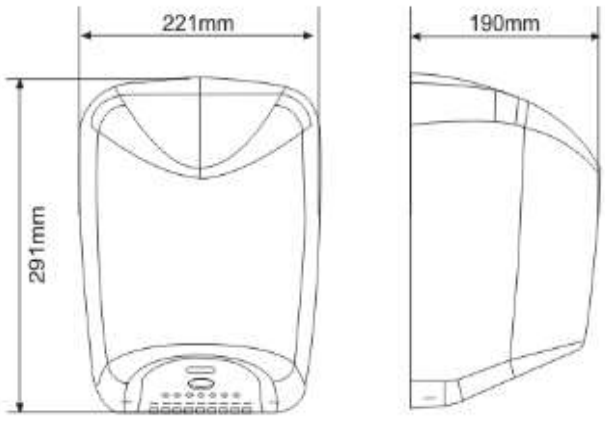

Tel: +86 571 888 685 70 Fax: +86 571 888 685 71
hotec@cnhotec.com www.cnhotec.com