HOTEC

HAND DRYER

SENSOR OPERATED	SMART



Reference: 11.261
ABS
white



Reference: 11.262
AISI 304 stainless steel
brigh



Reference: 11.263
AISI 304 stainless steel
satin

COMPONENTS & MATERIALS

·One-piece cover.
·High speed brush motor.
·Strong, vandal proof and build without edges.
·Induction motor incorporating a safety thermal cut-off.
·Electronic infrared detection sensor.
·PP aluminium centrifugal single inlet fan wheel.
·Cover fixed to the base by means of 2 screws.
·Easy maintenance.
·Dimension: 225 high x 282 wide x 160 deep mm.
·Dimension: 225 high x 282 wide x 147 deep mm. (ABS)

TECHNICAL SPECIFICATIONS

· **Material**	ABS or AISI 304 stainless steel
· **Cover thickness**	3.0/1.0 mm thick
· **Voltage/Frequency**	AC220V, 50/60Hz
· **r.p.m.**	2500
· **Total power**	1650W
· **Motor power**	60W
· Consumption	7.2A
· **Air velocity**	11m/s
· **Air temperature**	50-80℃
· **Noice level**	<70dB
· **Protection level**	IPX1

CERTIFICATE

CE RoHS

TECHNICAL DRAWING

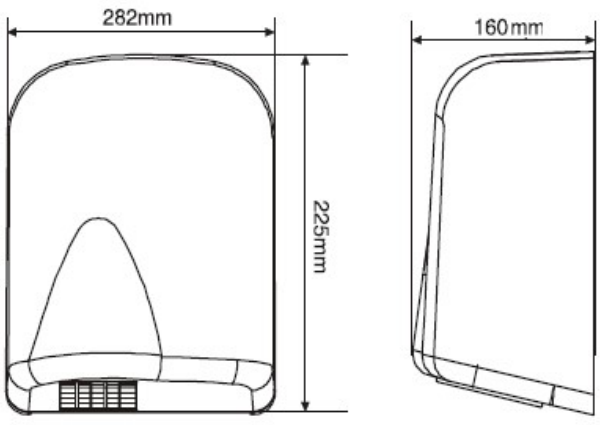

Tel: +86 571 888 685 70 Fax: +86 571 888 685 71
hotec@cnhotec.com www.cnhotec.com